PGF32I-1



Product Family	Hob
Built-in type	Ultra-low profile
Dimensions	30 cm
Power supply	Electric
Type	Induction
EAN code	8017709161941

Aesthetics

Aesthetic	Classica
Colour	Stainless steel/Black
Finishing	Satin
Material	Stainless Steel
Type of steel	Brushed
Frame	Yes
Frame colour	Stainless Steel
Type of control setting	Control knobs
Control knob position	Front
No. of controls	2
Controls colour	Steel effect
Logo	Silk screen
Serigraphy colour	Black

Program / Functions

No. of induction cook zones	2
Total no. of cook zones	2

Options

Worktop Cut-Out	494x292 mm	**Control Lock / Child Safety**	Yes

Technical Features


Front-centre - Induction - Single - 1.40 kW - Booster 2.20 kW - Ø 14.5 cm

Rear-centre - Induction - Single - 1.80 kW - Booster 3.00 kW - Ø 21.0 cm

Automatic setting according to pan dimension	Yes	**Automatic switch off when overheat**	Yes
		Residual heat indicator	Yes
pan detection	Yes	**Protection against accidental start up**	Yes
Minimum pan diameter indication	Yes		

Electrical Connection

Electrical connection rating (W)	3500 W	**Frequency (Hz)**	50/60 Hz
		Power supply cable length	120 cm
Current	16 A		
Voltage (V)	220-240 V	**Plug**	Not present
Type of electric cable installed	Yes, Single phase		

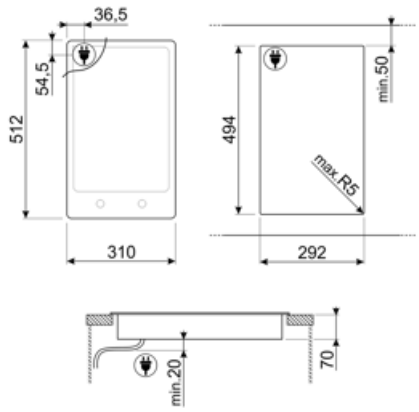

Compatible Accessories



6MP1PGF

6 Linea knobs for PGF hobs



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

LGPGF-1

Aluminium connecting strip for PGF

Symbols glossary



Ultra-low profile: Installation of product with flat edge - height of 1 mm.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



Knobs control



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.