

PGF32I-1



Product Family	Hob
Built-in type	Ultra-low profile
Dimensions	30 cm
Power supply	Electric
Type	Induction
EAN code	8017709161941



Aesthetics



Aesthetic	Classica
Colour	Stainless steel/Black
Finishing	Satin
Material	Stainless Steel
Type of steel	Brushed
Frame	Yes
Frame colour	Stainless Steel
Type of control setting	Control knobs
Control knob position	Front
No. of controls	2
Controls colour	Steel effect
Serigraphy colour	Black

Program / Functions

No. of induction cook zones	2
Total no. of cook zones	2

Options



Worktop Cut-Out	494x292 mm	Control Lock / Child Safety	Yes
-----------------	------------	-----------------------------	-----

## Technical Features




Front-centre - Induction - Single - 1.40 kW - Booster 2.20 kW - Ø 14.5 cm

Rear-centre - Induction - Single - 1.80 kW - Booster 3.00 kW - Ø 21.0 cm

<b>Automatic setting according to pan dimension</b>	Yes	<b>Automatic switch off when overheat</b>	Yes
<b>pan detection</b>	Yes	<b>Residual heat indicator</b>	Yes
<b>Minimum pan diameter indication</b>	Yes	<b>Protection against accidental start up</b>	Yes

## Electrical Connection

<b>Plug</b>	Not present	<b>Type of electric cable installed</b>	Yes, Single phase
<b>Electrical connection rating (W)</b>	3500 W	<b>Frequency (Hz)</b>	50/60 Hz
<b>Current</b>	16 A	<b>Power supply cable length</b>	120 cm
<b>Voltage (V)</b>	220-240 V		

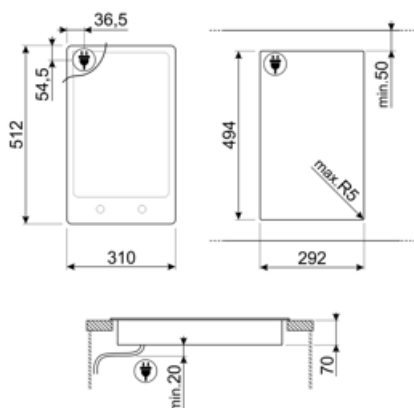

---

## Compatible Accessories

---

### 6MP1PGF

6 Linea knobs for PGF hobs



### SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

### LGPGF-1

Aluminium connecting strip for PGF



---

## Symbols glossary

---



Ultra-low profile: Installation of product with flat edge - height of 1 mm.



Knobs control



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.

---

## Benefit (TT)

---

### **Induction hobs**

Fast cooking and precise temperature control

### **Inox**

Maximum resistance even at high temperatures: the stainless steel surface ensures durability and deformation resistance, withstanding thermal shocks without damage

Accurate power adjustment via knobs, for more precise cooking level control

### **Control knob position frontal**

Instant and intuitive control thanks to front controls, easily accessible for practical use.