

# PGF32I-1



Familie  
Inbouw  
Afmeting  
Voeding  
Type  
EAN-code

Kookplaat  
Vlak opbouw  
30 cm  
Elektrisch  
Inductie  
8017709161941



## Design



Esthetiek  
Kleur  
Afwerking  
Materiaal  
Type roestvrijstaal  
Kader  
Kleur kader  
Type bediening  
Positie bediening  
Aantal bedieningsknoppen  
Kleur knoppen  
Kleur serigrafie

Classici  
Stainless steel/Black  
Geborsteld  
Roestvrij staal  
Geborsteld  
Ja  
Roestvrij staal  
Bedieningsknoppen  
Voor  
2  
Rvs look  
Zwart

## Program / Functions

|                          |   |
|--------------------------|---|
| Aantal inductiekookzones | 2 |
| Totaal aantal kookzones  | 2 |

## Opties



|                 |            |                   |    |
|-----------------|------------|-------------------|----|
| Worktop Cut-Out | 494x292 mm | Kinderbeveiliging | Ja |
|-----------------|------------|-------------------|----|

## Technische specificaties




Middenvoor - Inductie - enkel - 1.40 kW - Booster 2.20 kW - Ø 14.5 cm

Middenachter - Inductie - enkel - 1.80 kW - Booster 3.00 kW - Ø 21.0 cm

|                                          |    |                                          |    |
|------------------------------------------|----|------------------------------------------|----|
| Automatische herkenning panafmeting      | Ja | Automatische stop bij oververhitting     | Ja |
| Automatische panherkenning               | Ja | Restwarmte indicator                     | Ja |
| Indicator minimaal te gebruiken diameter | Ja | beveiliging tegen onbedoeld inschakeling | Ja |

## Elektrische aansluiting

|                  |           |                      |          |
|------------------|-----------|----------------------|----------|
| Aansluitwaarde   | 3500 W    | Frequentie           | 50/60 Hz |
| Stroom           | 16 A      | Lengte voedingskabel | 120 cm   |
| Spanning (V)     | 220-240 V | Stekker              | No       |
| Type stroomkabel | Eenfasig  |                      |          |

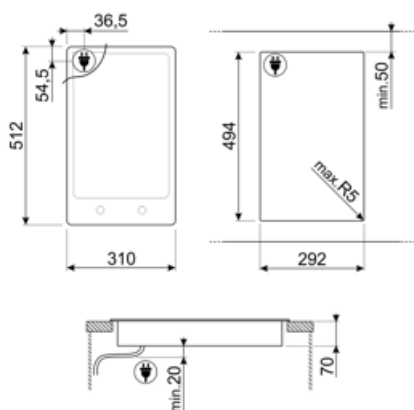

---

## Compatibele Accessoires

---

### 6MP1PGF

6 Linea knobs for PGF hobs



### SCRP

Inductie- en keramische kookplaten en  
teppanyaki-schraper

### LGPGF-1

Aluminium connecting strip for PGF



---

## Symbols glossary

---



Ultra-low profile: Installation of product with flat edge - height of 1 mm.



Kinderslot: sommige modellen zijn voorzien van een apparaat om het programma / de cyclus te vergrendelen zodat het niet kan per ongeluk veranderd



Knobs control



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.

---

## Benefit (TT)

---

### **Induction hobs**

Fast cooking and precise temperature control

### **Inox**

Maximum resistance even at high temperatures: the stainless steel surface ensures durability and deformation resistance, withstanding thermal shocks without damage

Accurate power adjustment via knobs, for more precise cooking level control

### **Control knob position frontal**

Instant and intuitive control thanks to front controls, easily accessible for practical use.