

PGF32I-1



Product Family	Hob
Built-in type	Ultra-low profile
Dimensions	30 cm
Power supply	Electric
Type	Induction
EAN code	8017709161941



Aesthetics



Aesthetic	Classic
Colour	Stainless steel/Black
Finishing	Satin
Material	Stainless Steel
Type of steel	Brushed
Frame	Yes
Frame colour	Stainless Steel
Type of control setting	Control knobs
Control knob position	Front
No. of controls	2
Controls colour	Steel effect
Serigraphy colour	Black

Programs / Functions

Total no. of cook zones	2
No. of induction cook zones	2

Options



Standard cut out	494x292 mm	Control Lock / Child Safety	Yes
------------------	------------	-----------------------------	-----

## Technical Features




Front-centre - Induction - Single - 1.40 kW - Booster 2.20 kW - Ø 14.5 cm

Rear-centre - Induction - Single - 1.80 kW - Booster 3.00 kW - Ø 21.0 cm

<b>Automatic setting according to pan dimension</b>	Yes	<b>Automatic switch off when overheat</b>	Yes
<b>pan detection</b>	Yes	<b>Residual heat indicator</b>	Yes
<b>Minimum pan diameter indication</b>	Yes	<b>Protection against accidental start up</b>	Yes

## Electrical Connection

<b>Electrical connection rating (W)</b>	3500 W	<b>Type of electric cable</b>	Single phase
<b>Current</b>	16 A	<b>Frequency (Hz)</b>	50/60 Hz
<b>Voltage (V)</b>	220-240 V	<b>Power supply cable length</b>	120 cm

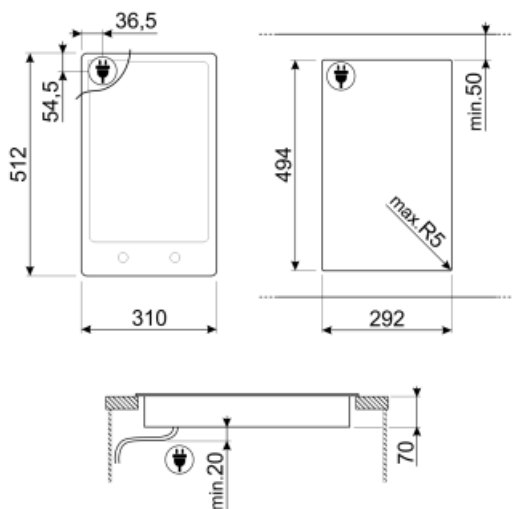

---

## Not included accessories

---



### **LGPGF-1**

Aluminium connecting strip for PGF



### **SCRP**

Induction and ceramic hobs and  
teppanyaki scraper

### **6MP1PGF**







6 Linea knobs for PGF hobs



---

## Symbols glossary (TT)

---

	Ultra-low profile: Installation of product with flat edge - height of 1 mm.		Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.
	Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.		Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.
	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.		Knobs control