

# PGF32I-1



<b>Product Family</b>	Hob
<b>Built-in</b>	Ultra-low profile
<b>Dimensions</b>	30 cm
<b>Power supply</b>	Electric
<b>Type</b>	Induction
<b>EAN code</b>	8017709161941



## Aesthetics



<b>Aesthetics</b>	Classic
<b>Colour</b>	Stainless steel/Black
<b>Finishing</b>	Brushed
<b>Material</b>	Stainless Steel
<b>Type of steel</b>	Brushed
<b>Frame</b>	Yes
<b>Frame colour</b>	Stainless Steel
<b>Type of control setting</b>	Control knobs
<b>Control knobs position</b>	Front
<b>No. of controls</b>	2
<b>Controls colour</b>	Steel effect
<b>Logo</b>	Silk screen
<b>Serigraphy colour</b>	Black

## Program / Functions

<b>No. of induction cook zones</b>	2
<b>Total no. of cook zones</b>	2

## Options



<b>Standard cut out</b>	494x292 mm	<b>Control Lock / Child Safety</b>	Yes
-------------------------	------------	------------------------------------	-----

## Technical Features




Front centre - Induction - single - 1.40 kW - Booster 2.20 kW - Ø 14.5 cm

Rear centre - Induction - single - 1.80 kW - Booster 3.00 kW - Ø 21.0 cm

<b>Automatic setting according to pan dimension</b>	Yes	<b>Automatic switch off when overheat</b>	Yes
<b>Automatic pan detection</b>	Yes	<b>Residual heat indicator</b>	Yes
<b>Minimum pan diameter indication</b>	Yes	<b>Protection against accidental start up</b>	Yes

## Electrical Connection

<b>Nominal power (W)</b>	3500 W	<b>Frequency (Hz)</b>	50/60 Hz
<b>Current</b>	16 A	<b>Power supply cable length</b>	120 cm
<b>Voltage (V)</b>	220-240 V	<b>Plug</b>	No
<b>Type of electric cable</b>	Single phase		

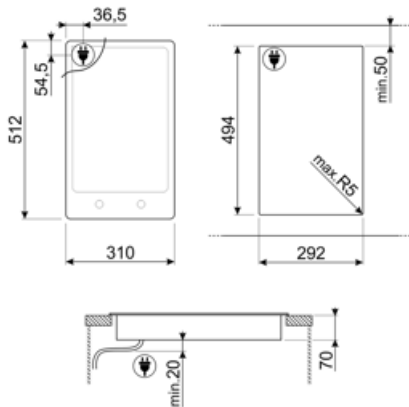

---

## Compatible Accessories

---

### 6MP1PGF

6 Linea knobs for PGF hobs



### SCRP

Induction and ceramic hobs and  
teppanyaki scraper

### LGPGF-1







Aluminium connecting strip for PGF



---

## Symbols glossary

---

- |  |   |   |  |
|--|---|---|--|
|  | Ultra-low profile: Installation of product with flat edge - height of 1 mm.   |  | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.   |
|  | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.   |  | Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob. |
|  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |  | Knobs control  |