

# PGF32I-1



Product Family  
Built-in type  
Dimensions  
Power supply  
Type  
EAN code

Hob  
Ultra-low profile  
30 cm  
Electric  
Induction  
8017709161941



## Aesthetics



Aesthetic	Classica
Colour	Stainless steel
Finishing	Satin
Material	Stainless Steel
Type of steel	Brushed
Frame	Yes
Type of control setting	Control knobs
Control knob position	Front
No. of controls	2
Controls colour	Steel effect
Serigraphy colour	Black

## Programs / Functions


Total no. of cook zones	2
No. of induction cook zones	2

## Options



Worktop Cut-Out	494x292 mm	Control Lock / Child Safety	Yes
-----------------	------------	-----------------------------	-----

## Technical Features




Front-centre - Induction - Single - 1.40 kW - Booster 2.20 kW - Ø 14.5 cm

Rear-centre - Induction - Single - 1.80 kW - Booster 3.00 kW - Ø 21.0 cm

<b>Automatic setting according to pan dimension</b>	Yes	<b>Automatic switch off when overheat</b>	Yes
<b>pan detection</b>	Yes	<b>Residual heat indicator</b>	Yes
<b>Minimum pan diameter indication</b>	Yes	<b>Protection against accidental start up</b>	Yes

## Electrical Connection

<b>Electrical connection rating (W)</b>	3500 W	<b>Type of electric cable supplied</b>	Yes, Single phase
<b>Current</b>	16 A	<b>Frequency (Hz)</b>	50/60 Hz
<b>Voltage (V)</b>	220-240 V	<b>Power supply cable length</b>	120 cm

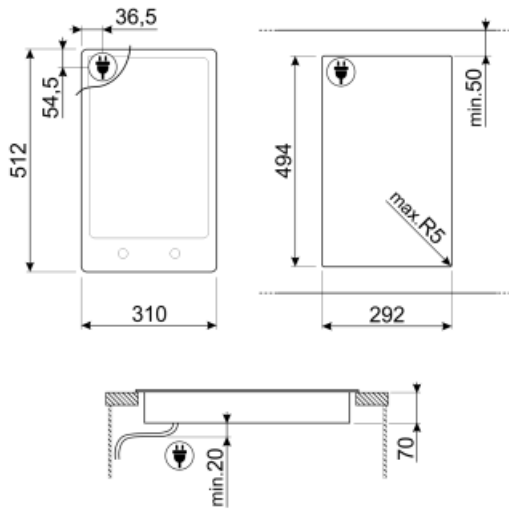

---

## Not included accessories

---



### LGPGF-1

Aluminium connecting strip for PGF



### SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs







### 6MP1PGF

6 Linea knobs for PGF hobs



## Symbols glossary (TT)

---

- |  |   |   |  |
|--|---|---|--|
|  | Ultra-low profile: Installation of product with flat edge - height of 1 mm.   |  | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.   |
|  | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.   |  | Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob. |
|  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |  | Knobs control  |