# PGF32I-1




| | |
|---|---|
| **Product Family** | Hob |
| **Built-in type** | Ultra-low profile |
| **Dimensions** | 30 cm |
| **Power supply** | Electric |
| **Type** | Induction |
| **EAN code** | 8017709161941 |

## Aesthetics

| | |
|---|---|
| **Aesthetic** | Classica |
| **Colour** | Stainless steel/Black |
| **Finishing** | Satin |
| **Material** | Stainless Steel |
| **Type of steel** | Brushed |
| **Frame** | Yes |
| **Frame colour** | Stainless Steel |
| **Type of control setting** | Control knobs |
| **Control knob position** | Front |
| **No. of controls** | 2 |
| **Controls colour** | Steel effect |
| **Logo** | Silk screen |
| **Serigraphy colour** | Black |

## Program / Functions

| | |
|---|---|
| **No. of induction cook zones** | 2 |
| **Total no. of cook zones** | 2 |

## Options

| | | | |
|---|---|---|---|
| **Worktop Cut-Out** | 494x292 mm | **Control Lock / Child Safety** | Yes |

## Technical Features


Front-centre - Induction - Single - 1.40 kW - Booster 2.20 kW - Ø 14.5 cm

Rear-centre - Induction - Single - 1.80 kW - Booster 3.00 kW - Ø 21.0 cm

| | | | |
|---|---|---|---|
| **Automatic setting according to pan dimension** | Yes | **Automatic switch off when overheat** | Yes |
| | | **Residual heat indicator** | Yes |
| **pan detection** | Yes | **Protection against accidental start up** | Yes |
| **Minimum pan diameter indication** | Yes | | |

## Electrical Connection

| | | | |
|---|---|---|---|
| **Electrical connection rating (W)** | 3500 W | **Frequency (Hz)** | 50/60 Hz |
| | | **Power supply cable length** | 120 cm |
| **Current** | 16 A | | |
| **Voltage (V)** | 220-240 V | **Plug** | Not present |
| **Type of electric cable installed** | Yes, Single phase | | |

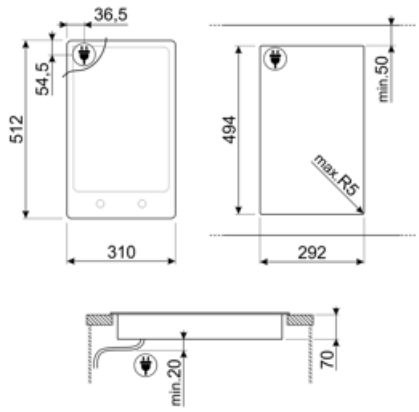

## Compatible Accessories



**6MP1PGF**

6 Linea knobs for PGF hobs



**SCRP**

Non-scratch hob scraper - suitable for induction and ceramic hobs



**LGPGF-1**

Aluminium connecting strip for PGF

## Symbols glossary



Ultra-low profile: Installation of product with flat edge - height of 1 mm.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



Knobs control




Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.