

PGF64-4



Product familie

Type

Afmeting

Voeding

Type

EAN-code

Kookplaat


Vlak opbouw

60 cm

Gas en Elektriciteit

Gas

8017709153588

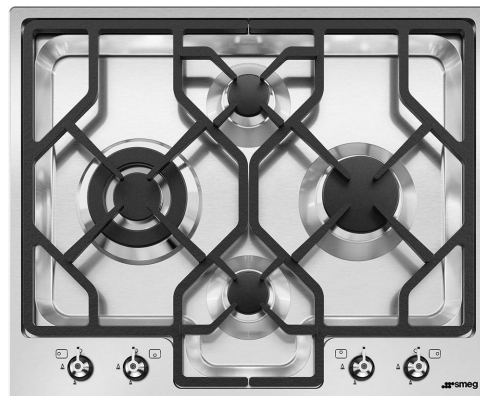

Design



Design

Kleur

Afwerking

Materiaal

Type staal

Pottendragers

Gasbranders

Materiaal branders

Bediening

Positie bediening

Aantal bedieningsknoppen

Kleur bedieningsknoppen

Kleur serigrafie

Classici

Inox

Geborsteld inox

Inox

Geborsteld inox

Gietijzeren pottendragers

Standaard branders

Aluminium

Bedieningsknoppen

Vooraan

4

Inox look

Zwart

Programma's / Functies

Totaal aantal kookzones

4

Aantal kookzones gas

4

Opties

Worktop Cut-Out

488x592 mm

Technische specificaties

UR

Linksvoor - Gas - URP - 3.90 kW

Middenachter - Gas - AUX - 1.05 kW

Middenvoor - Gas - AUX - 1.05 kW

Rechts - Gas - RP - 2.50 kW

Thermobeveiliging Ja

Automatische
ontsteking Ja

Meegeleverde accessoires

Gietijzeren wokring 1

Elektrische aansluiting

Nominale aansluitwaarde 1 W

Frequentie 50/60 Hz

Spanning (V) 220-240 V

Lengte voedingskabel 120 cm

Type stroomkabel Eenfasig

Gasaansluiting


Type gas G20 Aardgas

Andere gasaansluitingen Konisch

Gasaansluiting Cilindrisch

Nominale aansluitwaarde gas 8500 W

Andere sproeiers meegeleverd Sproeiers butaan/propaan gas meegeleverd

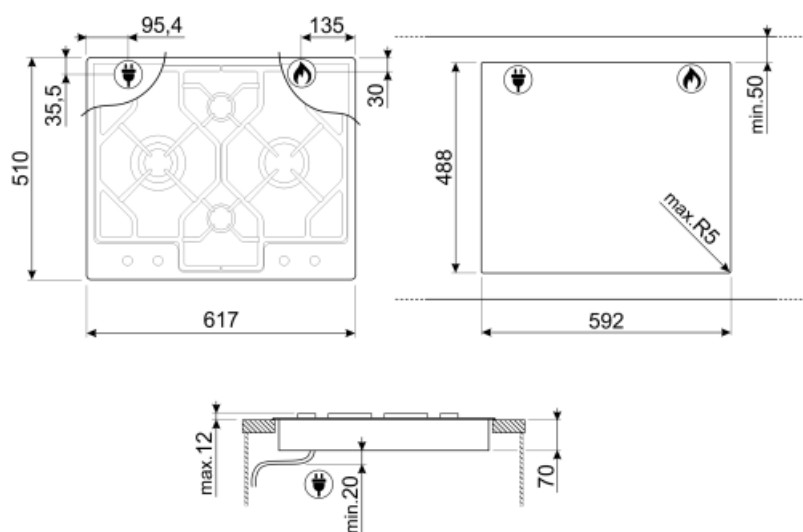

Not included accessories

6MP1PGF

6 Linea knobs for PGF hobs



Symbols glossary (TT)

	Ultra-low profile: Installation of product with flat edge - height of 1 mm.		Heavy duty cast iron pan stands: for maximum stability and strength.
	Ultra rapid burners: Powerful ultra rapid burners offer up to 5kw of power.		Knobs control