


PGF64SA



Product Family
Built-in type
Dimensions
Power supply
Type
EAN code

Hob
Ultra-low profile
60 cm
Gas
Gas
8017709266479

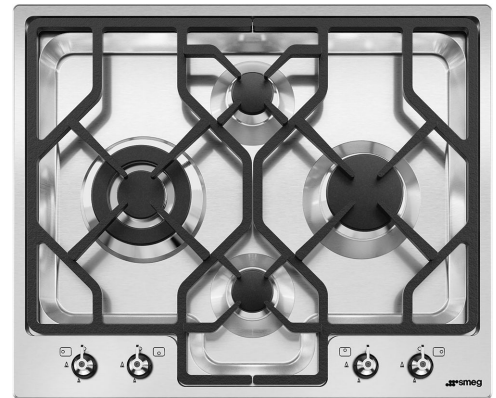

Aesthetics



Aesthetic
Colour
Acabamento
Material
Type of steel
Frame
Pan stands
Pan Stand Coating
Burners
Burners Material
Burner Coating
Type of control setting
Control knob position
No. of controls
Controls colour
Illuminated control knobs
Control knob protection

Serigraphy colour
Alternative colours available

Classica
Stainless steel
Satin
Stainless Steel
Brushed
No
Cast iron
No
Standard
Alluminium
No
Control knobs
Front
4
Steel effect
No
No

Black
No

Program / Functions

No. of gas cook zones 4
Total no. of cook zones 4

Options

Corte padrão 488x592 mm

Technical Features

UR

Left - Gas - UR - 3.90 kW

Rear-centre - Gas - AUX - 1.05 kW

Front-centre - Gas - AUX - 1.05 kW

Right - Gas - Rapid - 2.50 kW

Gas safety valves Yes Automatic Ignition Yes

Accessories Included


Cast iron wok support 1 Other accessories No

Electrical Connection





Plug No Frequency (Hz) 50/60 Hz
Electrical connection rating (W) 1 W Comprimento do cabo de alimentação 120 cm
Voltage (V) 220-240 V Ficha eléctrica No
Type of electric cable Single phase

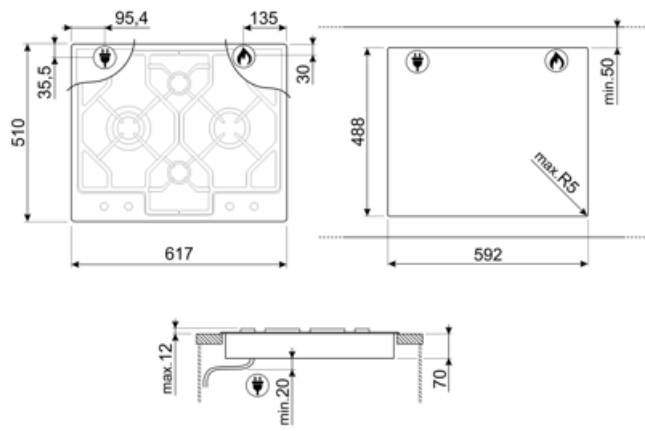Gas Connection

Gas Type G30 GPL Liquid gas Other gas connections provided Conical
Ligação ao gás Ligação ao gás cilíndrica
Other gas nozzles included G110 City gas Gas connection rating (W) 8500 W



Symbols glossary

- | | | | |
|--|---|---|---|
|  | Perfil ultra baixo: Instalação de produto com borda plana - altura de 1 mm. |  | Suportes de ferro fundido para serviço pesado: para máxima estabilidade e resistência. |
|  | Controle dos botões |  | Queimadores ultrarrápidos: Queimadores ultrarrápidos potentes oferecem até 5kw de potência. |