


# PGF962



<b>Product Family</b>	Hob
<b>Built-in type</b>	Ultra-low profile
<b>Dimensions</b>	90 cm
<b>Power supply</b>	Gas
<b>Type</b>	Gas
<b>EAN code</b>	8017709327187

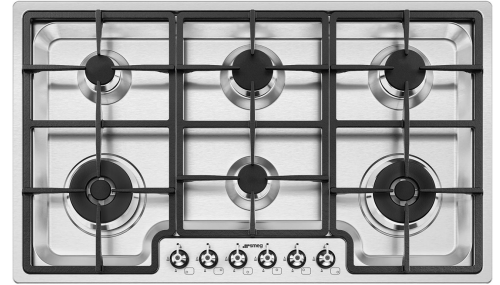

## Aesthetics



<b>Aesthetic</b>	Classica
<b>Colour</b>	Stainless steel
<b>Acabamento</b>	Satin
<b>Material</b>	Stainless Steel
<b>Type of steel</b>	Brushed
<b>Frame</b>	No
<b>Pan stands</b>	Cast iron
<b>Pan Stand Coating</b>	No
<b>Burners</b>	Standard
<b>Burners Material</b>	Alluminium
<b>Burner Coating</b>	No
<b>Type of control setting</b>	Control knobs
<b>Control knob position</b>	Front
<b>No. of controls</b>	6
<b>Controls colour</b>	Steel effect
<b>Illuminated control knobs</b>	No
<b>Control knob protection</b>	No
<b>Serigraphy colour</b>	Black
<b>Alternative colours available</b>	No


## Program / Functions

<b>No. of gas cook zones</b>	6
<b>Total no. of cook zones</b>	6

## Options

Corte padrão 482x847 mm

## Technical Features



Front-left - Gas - UR - 4.00 kW  
Rear-left - Gas - AUX - 1.05 kW  
Front-centre - Gas - AUX - 1.05 kW  
Rear-centre - Gas - Semi Rapid - 1.75 kW  
Front-right - Gas - UR - 4.00 kW  
Rear-right - Gas - Semi Rapid - 1.75 kW  
Gas safety valves Yes  
Automatic Ignition Yes  
Sensor de calor perfeito No

Aquecimento Ecológico No  
Eco-Off No

## Accessories Included

Cast iron wok support 2 Other accessories No

## Electrical Connection


Plug No  
Electrical connection rating (W) 1 W  
Voltage (V) 220-240 V  
Type of electric cable Single phase

Frequency (Hz) 50/60 Hz  
Comprimento do cabo de alimentação 120 cm  
Ficha elétrica No

## Gas Connection

Gas Type G20 Natural gas  
Ligação ao gás Ligação ao gás cilíndrica  
Other gas nozzles included G30 GPL Liquid gas

Other gas connections provided Conical  
Gas connection rating (W) 13600 W

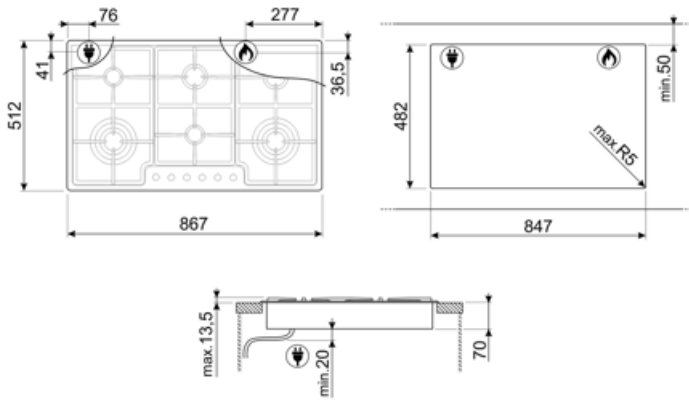

---

## Compatible Accessories

---

**6MP1PGF**

6 Botões Linea para placas PGF



**GRW**

Suporte para wok



**GRM**

Suporte moka para placas a gás



**WOKGHU**

Suporte de ferro fundido para WOK



---

## Symbols glossary

---



Perfil ultra baixo: Instalação de produto com borda plana - altura de 1 mm.



Suportes de ferro fundido para serviço pesado: para máxima estabilidade e resistência.



Controle dos botões



Queimadores ultrarrápidos: Queimadores ultrarrápidos potentes oferecem até 5kw de potência.