

# PIP2951D

**Product Family**

Hob

**Built-in type**

Ultra-low profile or Fully Flushed

**Dimensions**

90 cm

**Power supply**


Electric

**Type**

Induction

**EAN code**

8017709310073

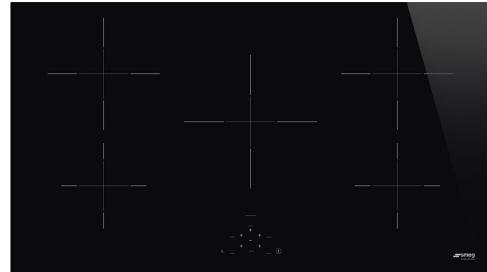

## Aesthetics

**Aesthetic**

Universale

**Colour**

Black

**Finishing**

Glass

**Material**

Glass

**Glass type**

Ceramic

**Glass edge**

Straight edge

**Type of control setting**

Touch controls

**Slider**

Yes

**Slider**

Red

**Control knob position**

Front

**Logo**

Silk screen

**Serigraphy colour**

Grey

## Program / Functions

**No. of induction cook zones**

5

**Time-setting options**

Automatic Shutdown

**No. of cooking zones with booster**

5

**Main on/off switch**

Yes

**Power levels**

9

**Total no. of cook zones**

5

## Options



Standard cut out	478-482x839-844 mm	Limited Power Consumption Mode	Advanced Eco Logic
Keep warm automatic function	Yes	Limited Power Consumption Mode in W	2400 a 7400 - step 100 W
End cooking timer	5	Showroom Demo Option	Yes
Pause option	Yes	Control Lock / Child Safety	Yes
Minute minder	1	Quick start	Yes
End of cooking alarm	Yes	Rapid level selection	Yes
Residual time indicator	Yes		

## Technical Features



Front-left - Induction - Single - 1.40 kW - Booster 2.10 kW - Ø 16.0 cm

Rear-left - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm

Central - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 25.0 cm


Rear-right - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm

Front-right - Induction - Single - 1.40 kW - Booster 2.10 kW - Ø 16.0 cm

Automatic setting according to pan dimension	Yes	Automatic switch off when overflow	Yes
pan detection	Yes, min 7 cm	Residual heat indicator	Yes
Permanent Automatic Pot Detection with indication of the relative control	Yes	Protection against accidental start up	Yes
Automatic switch off when overheat	Yes		

## Electrical Connection

Electrical connection rating (W)	7400 W	Type of electric cable	Double phase
Current	33 A	Frequency (Hz)	50/60 Hz
Voltage (V)	220-240 V	Power supply cable length	120 cm
Voltage 2 (V)	380-415 V	Terminal box	5 poles
Type of electric cable	Single phase	Plug	No

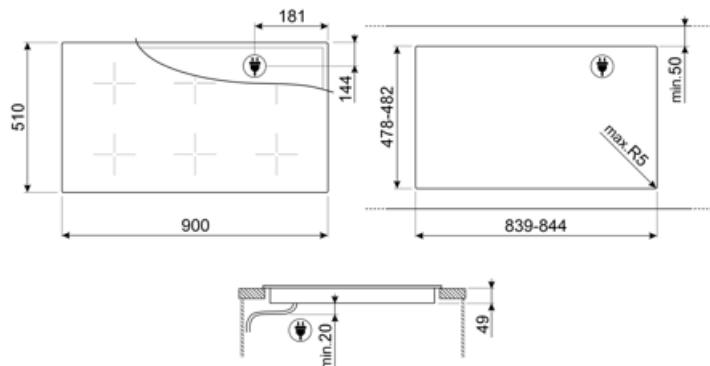

---

## Compatible Accessories

---



**SCRP**

Induction and ceramic hobs and teppanyaki scraper

## Symbols glossary



...



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



Touch control



The slider control panel allows you to adjust the power simply by passing your finger across the touch device.



Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



...



PAUSE\_72dpi



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Time elapsed: shows how long the cooking zone has been in use.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



...