PIP364D1

Product Family	Hob
Built-in type	Ultra-low profile or Fully Flushed
Dimensions	60 cm
Power supply	Electric
Type	Induction
EAN code	8017709292409



Aesthetics

Aesthetic	Universale
Colour	Black
Finishing	Glass
Material	Glass
Glass type	Ceramic
Glass edge	Straight edge
Type of control setting	Touch controls
Slider	Red
Control knob position	Front
Logo	Silk screen
Serigraphy colour	Grey

Program / Functions

No. of induction cook zones	4
Time-setting options	Automatic Shutdown
No. of cooking zones with booster	4
Main on/off switch	Yes
Power levels	9
Total no. of cook zones	4

Options

Standard cut out	478-482x555-560 mm
End cooking timer	4
Minute minder	1
End of cooking alarm	Yes
Residual time indicator	Yes
Limited Power Consumption Mode	Yes
Limited Power Consumption Mode in W	1000, 1600, 2200, 2800, 3500, 6000, 7200 W
Control Lock / Child Safety	Yes


Technical Features

Front-left - Induction - Single - 1.85 kW - Booster 2.10 kW - Ø 21.0 cm
Rear-left - Induction - Single - 1.40 kW - Booster 1.60 kW - Ø 15.0 cm
Rear-right - Induction - Single - 1.85 kW - Booster 2.10 kW - Ø 21.0 cm
Front-right - Induction - Single - 1.40 kW - Booster 1.60 kW - Ø 15.0 cm

Automatic setting according to pan dimension	Yes
pan detection	Yes
Minimum pan diameter indication	Yes
Automatic switch off when overheat	Yes
Residual heat indicator	Yes
Protection against accidental start up	Yes

Electrical Connection

Electrical connection rating (W)	7200 W
Current	32 A
Voltage (V)	220-240 V
Voltage 2 (V)	380-415 V
Type of electric cable	Single and Double phase
Frequency (Hz)	50/60 Hz
Plug	No

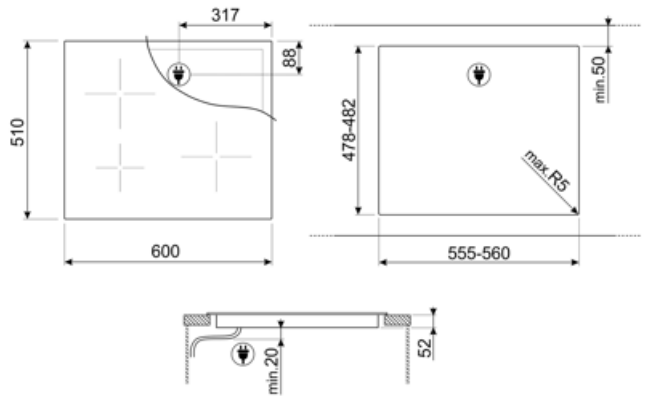

Compatible Accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper

Symbols glossary



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



Touch control



CUT_OUT_STANDARD_72dpi



ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Time elapsed: shows how long the cooking zone has been in use.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.