
# PL292DB

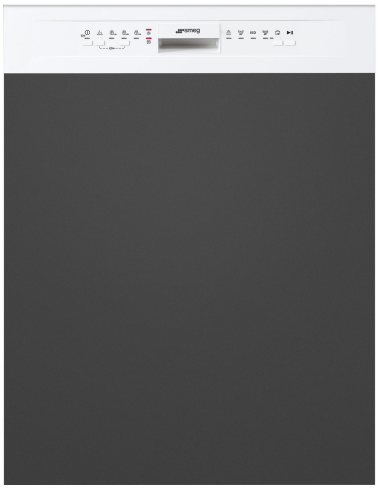

| | |
|---|---|
| **Product Family** | Dishwashers |
| **Commercial width** | 60 cm |
| **Commercial height** | 82 cm |
| **Installation** | Partially-integrated built-in |
| **Kitchen panel** | Not supplied |
| **N° baskets** | 2 |
| **EAN code** | 8017709307073 |

## Programs

| | | | |
|---|---|---|---|
| **N. of programmes** | 5 | **Mix** | Yes |
| **Washing temperatures** | 50, 65, 70 °C | **Intense** | Yes |
| **Soak** | Yes | **1/2 load** | Yes |
| **ECO** | Yes | | |

## Options

| | | | |
|---|---|---|---|
| **Delay timer option** | 3-6-9 hours | **Extra dry option** | Yes |

## Baskets


| | | | |
|---|---|---|---|
| **Basket colour** | Grey | **Largest loadable dish in upper basket** | 25,0 cm |
| **Basket components colour** | Grey | **Lower Basket** | With 2 foldable racks |
| **Handle** | In plastic on upper and lower basket | **Lower basket with anti-drip inserts** | Yes |
| **Upper Basket** | With central fixed racks | **Largest loadable dish in lower basket** | 30,0 cm |
| **Glass holder** | Yes | **Colour Inner Components** | Green |
| **Height adjustment of the upper basket** | On three levels (5 cm) | **Cutlery basket** | Yes |

## Technical Features



| | |
|---|---|
| **Width (mm)** | 598 mm |
| **Depth (mm)** | 570 mm |
| **Product Height (mm)** | 818 mm |
| **Controls** | Electronic |
| **Programme graphics** | Symbols |
| **On/off indicator** | Yes |
| **Salt light indicator** | Light |
| **Rinse aid indicator** | Light |
| **End of cycle indicator** | Acoustic signal |
| **Auto switch-off** | Yes |
| **Washing system** | Standard |
| **Third spray arm** | Single |
| **Water softener** | With electronic setting |
| **Flood protection system** | Total Acquastop |
| **Water supply** | Single; cold/hot water max. 60°C - energysave with hot water up to 35% |
| **Max water hardness** | 100°fH;58°dH |
| **Drying system** | Natural condenser drying, with Dry Assist + automatic door opening system at the end of the cycle |
| **Steam protection** | In plastic |
| **Tub material** | Stainless steel |
| **Filter** | Stainless steel |
| **Concealed heating element** | Yes |
| **Hinges** | Self balancing with fixed hinges |
| **Min. and max plinth height** | 100 - 215 mm |
| **Adjustable feet** | 7 cm, from 820 to 890 mm |
| **Depth of dishwasher with open door (mm)** | 1146 mm |
| **Back feet adjustable from front** | Yes |
| **Top cover** | In plastic |


## Performance / Energy Label - Reg. 2019





| | |
|---|---|
| **Energy Efficiency Class** | D |
| **Energy consumption [per 100 cycles, based on the eco programme]** | 84 kWh |
| **Rated capacity (ps)** | 13 |
| **Water consumption [per cycle]** | 12,0 litres |
| **Programme duration** | 4:10 h:min |
| **Airborne acoustical noise emissions** | 49 dB(A) re 1 pW |
| **Airborne acoustical noise emission class** | C |
| **Energy efficiency Index (EEI)** | 49,9 |

## Electrical Connection

| | |
|---|---|
| **Connected power** | 1800 W |
| **Current** | 10 A |
| **Voltage** | 220-240 V |
| **Frequency (Hz)** | 50 Hz |
| **Type of connection** | Single-phase |
| **Power supply cable length** | 140 cm |
| **Plug** | (F;E) Schuko |

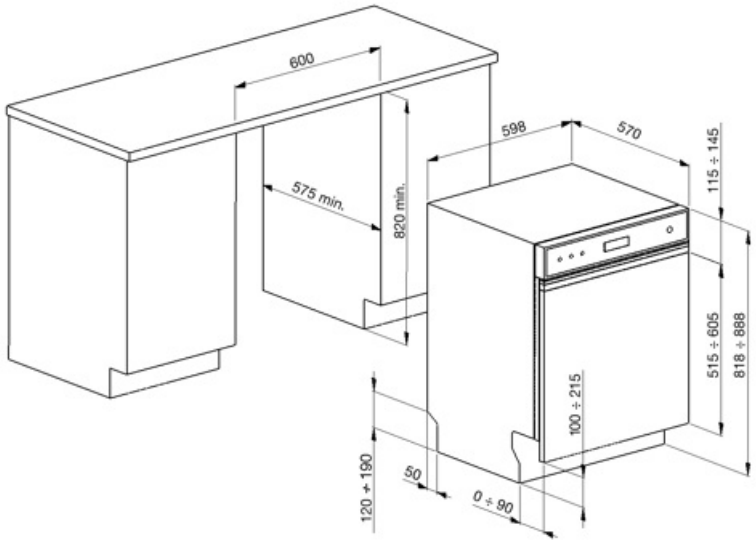
600
575 min.
820 min.
598
570
115 ÷ 145
515 ÷ 605
818 ÷ 888
100 ÷ 215
120 ÷ 190
50
0 ÷ 90

## Compatible Accessories



**KITGH**

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



**KITPL60FABN**

Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



**KITPLV2**

Kit extension for dishwasher and washing machine: lenght mt. 2



**KITPL60FABB**

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



**KITPL60FABX**

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

## Alternative products



**PL292DX**

**Colour:** Stainless Steel



**PL292DN**

**Colour:** Black

## Symbols glossary



To improve the drying of dishes without leaving stains.



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.




1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher.




Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.




Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



EXTRA DRY This option adds a hot rinse cycle that ensures improved drying.



The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.




82 cm high




Noise Level: Excellent insulation and special devices keep noise to a minimum.




Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.




13 place settings: Number of place settings.




System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



Energy efficiency class D