

PL292DN





Product Family Dishwashers
Width 60 cm
Commercial height 82 cm

Installation Partially-integrated built-in

Kitchen panel Not supplied

N° baskets

 Motor
 Inverter 2.0

 EAN code
 8017709307080



Programmes











No. of programmes 5
Washing temperatures 50, 65, 70 °C
Soak Yes
ECO Yes

Mix Yes Intense Yes

Daily 1/2 load Yes

Yes

With 2 foldable racks

Options





Delay timer option 3-6-9 hours, with automatic Extra dry option

soak

Baskets



Handle

Basket colour Grey Largest loadable dish in 25,0 cm
Basket components Grey upper basket

colour

In plastic on upper and lower basket

On three levels

Upper Basket With central fixed racks

Glass holder Y

Height adjustment of the upper basket

Yes

h central fixed racks Largest loadable dish in 30,0 cm

lower basket

drip inserts

Lower Basket

Colour Inner Green

Lower basket with anti- Yes

Components

Cutlery basket Yes



Technical Features



Width (mm) 598 mm

Depth (mm) 570 mm

Product Height (mm) 818 mm

Controls Electronic

Programme graphics Symbols

On/off indicator Yes
Salt light indicator Light
Rinse aid indicator Light

End of cycle indicator Acoustic signal Washing system Standard Third spray arm Single

Water softener With electronic setting Flood protection system Total Acquastop

Water supply Single; cold/hot water max.

60°C - energysave with hot water up to 35%

Max water hardness 100°fH;58°dH

Drying systemNatural condenser drying,
with Dry Assist + automatic

door opening system at the

end of the cycle

Steam protectionIn plasticTank materialStainless steelFilterStainless steel

Concealed heating

element Hinges

Self balancing with fixed

Yes

hinges

100 - 215 mm

Min. and max plinth

height

Adjustable feet 7cm, from 820 to 890 mm

Depth of dishwasher with open door (mm)

Back feet adjustable from front

Top cover

Yes

1146

In plastic

Performance / Energy Label

84 KWh

13









Energy Efficiency Class D

(Washing cycle)

Energy consumption [per 100 cycles, based on the eco programme] Rated capacity (ps)

Water consumption [per 12,0 litres

cycle]

Programme duration
Airborne acoustical

noise emissions (spinning phase) Airborne acoustical noise emission class

Energy efficiency Index (EEI) (Washing cycle)

4:10 h:min

49 dB(A) re 1 pW

С

49,9


Electrical Connection

Plug (F;E) Schuko
Connected power 1800 W
Current 10 A
Voltage 220-240 V

Frequency (Hz)
Type of connection
Power supply cable
length

50 Hz Single-phase 140 cm



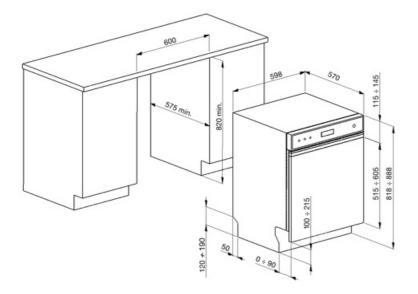



Compatible Accessories

KITGH



Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

KITPL60FABN



Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: length mt. 2

KITPL60FABB

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



Alternative products



PL292DX

Colour: Stainless steel



PL292DB

Colour: White



Symbols glossary



Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying.



Energy efficiency class D



COMM_HEIGHT_82_72dpi



Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.



The symbols show the number of plate settings of the dishwasher.



The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.

