

PL292DX





Product Family Dishwashers
Commercial width 60 cm
Commercial height 82 cm

Installation Partially-integrated built-in

Kitchen panel Not supplied

N° baskets

 Motor
 Inverter 2.0

 EAN code
 8017709307097



Programme / Functions











N. of programmes5MixYesWashing temperatures50, 65, 70 °CIntenseYesSoakYes1/2 loadYes

ECO Yes

Options





Delay timer option 3-6-9 hours Extra dry option Yes

Baskets



Basket colour Grey Largest loadable dish in 25,0 cm

Basket components Grey upper basket

colour Lower Basket With 2 foldable racks

Handle In plastic on upper and Lower basket with anti- Yes

lower basket drip inserts

Upper Basket With central fixed racks Largest loadable dish in 30,0 cm

Glass holder Yes lower basket

Height adjustment of On three levels (5 cm) Colour Inner Green

the upper basket

Components

Cutlery basket

Yes



Technical Features



Width (mm) 598 mm 570 mm Depth (mm) Product Height (mm) 818 mm Controls Electronic Programme graphics Symbols

On/off indicator Yes Salt light indicator Light Rinse aid indicator Light

End of cycle indicator Acoustic signal Washing system Standard Third spray arm Single

Water softener With electronic setting Flood protection system Total Acquastop

Water supply Single; cold/hot water max.

60°C - energysave with hot

water up to 35%

Max water hardness 100°fH;58°dH Drying system

Natural condenser drying, with Dry Assist + automatic door opening system at the

end of the cycle

Steam protection In plastic Tub material Stainless steel Filter Stainless steel

Concealed heating

element

Hinges Self balancing with fixed

hinges

100 - 215 mm

Yes

Min. and max plinth

height

7cm, from 820 to 890 mm Adjustable feet

Depth of dishwasher with open door (mm)

Back feet adjustable

from front Top cover

Yes

1146

In plastic

Performance / Energy Label NEW 2019









Energy Efficiency Class

Energy consumption 84 KWh [per 100 cycles, based on the eco programme]

Rated capacity (ps) 13

Water consumption [per 12,0 litres

cycle]

Programme duration Airborne acoustical

noise emissions Airborne acoustical noise emission class

Energy efficiency Index

(EEI)

4:10 h:min

49 dB(A) re 1 pW

С

49,9


Electrical Connection

Plug (F;E) Schuko Connected power 1800 W Current 10 A Voltage 220-240 V

Frequency (Hz) Type of connection Power supply cable length

50 Hz Single-phase 140 cm



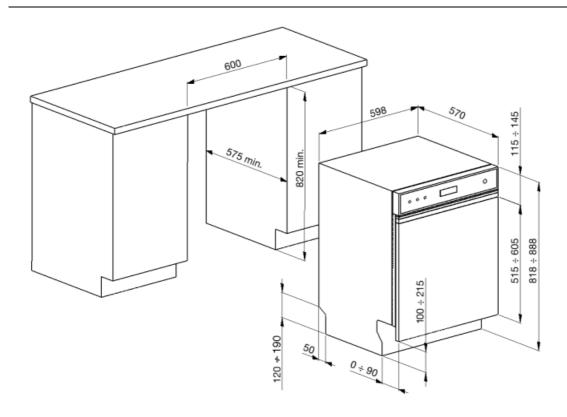



Not included accessories

KITPL60FABB



Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPL60FABN



Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITGH



Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2



Alternative products



PL292DB Colour: White



PL292DN Colour: Black



Symbols glossary (TT)



To improve the drying of dishes without leaving stains.



82 cm high



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Energy efficiency class D



1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.



13 place settings: Number of place settings.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



EXTRA DRY This option adds a hot rinse cycle that ensures improved drying.



The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.