

PL364CN







Product Family

Width 60 cm Commercial height 82 cm

Installation Partially-integrated built-in

Kitchen panel Not supplied N° baskets 3, FlexiDuo Motor Inverter 2.0 EAN code 8017709307127



Yes

Yes

Yes

Programmes



















Dishwashers







No. of programmes

Washing temperatures 38, 45, 50, 55, 65, 70, 75 °C

Soak Express 27' Yes Crystal Yes Full express - 60

minutes

ECO

10 + 1

Yes

Yes

Auto sensor 45-65

Quiet (-2 dB) Yes Intense Yes Self clean Yes

Hygiene 99,9% Yes

Options









Dry Assist+ option **Delay timer option**

Up to 24 hours, with automatic soak

1/2 load FlexiZone option (varied distribution)

Special programs option Yes

Baskets



Basket colour

Basket components

colour

Grey Grey

Largest loadable dish in 19,0 cm

upper basket

With 2 foldable racks Lower Basket



Handle

In plastic on upper and

lower basket

On three levels

Upper Basket Glass holder

With central fixed racks

Yes

Height adjustment of the upper basket

drip inserts

Largest loadable dish in 30,0 cm

Lower basket with anti- Yes

lower basket

Colour Inner Components Green

Yes

Technical Features







Width (mm) 598 mm Depth (mm) 570 mm Display type 3 digit Product Height (mm) 818 mm Controls Electronic

Display Delayed start, Programme

time indicator, Time to end

indication

Symbols Programme graphics On/off indicator Yes Salt light indicator Light Rinse aid indicator Light **Progress indicator** Yes

End of cycle indicator Acoustic signal

Washing system Orbital Third spray arm Single With electronic setting

Water softener

Turbidity sensor

Aquatest

Flood protection system Total Acquastop

Water supply

Single; cold/hot water max.

60°C - energysave with hot

water up to 35% 100°fH:58°dH

Max water hardness Drying system

Natural condenser drying,

with Dry Assist + automatic door opening system at the

end of the cycle

In plastic Steam protection Stainless steel Tank material Filter Stainless steel

Concealed heating

element

Hinges

Self balancing with fixed

hinges

Yes

Min. and max plinth

height

Adjustable feet Depth of dishwasher with open door (mm)

Back feet adjustable

from front

Top cover

100 - 215 mm

7cm, from 820 to 890 mm

1146 mm

Yes

In plastic

Performance / Energy Label









Energy Efficiency Class

(Washing cycle)

Energy consumption 73 kWh [per 100 cycles, based on the eco programme]

Rated capacity (ps) 13

Water consumption [per 9.0 litres

cycle]

Programme duration Airborne acoustical noise emissions

(spinning phase) Airborne acoustical noise emission class

Energy efficiency Index (EEI) (Washing cycle)

4:25 h:min

46 dB(A) re 1 pW

С

43.8

Electrical Connection




Connected power 1800 W Current 10 A Voltage 220-240 V Frequency (Hz) 50 Hz

Type of connection Power supply cable length Plug

Single-phase 140 cm

(F;E) Schuko

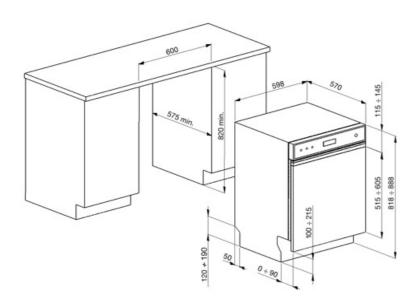



Compatible Accessories

KITGH



Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

KITPL60FABN



Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: length mt. 2

KITPL60FABB

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



Alternative products



PL364CX

Colour: Stainless steel



Symbols glossary



Aquatest measures the clarity of the water during an auto program, and automatically ensures the minimum consumption of water and energy.



Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying.



Energy efficiency class C



COMM_HEIGHT_82_72dpi



Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.



The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the wash c



FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.



FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash.



Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.



Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



...



Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.



•••



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Rapid 27 Mins: The rapid 27 mins quick program takes just 27 minutes to wash a load.



HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria, making it ideal for sanitising



Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.



The symbols show the number of plate settings of the dishwasher.





Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.