

PV164S2



| | |
|----------------|---------------|
| Product Family | Hob |
| Built-in type | Traditional |
| Dimensions | 60 cm |
| Power supply | Gas |
| Type | Gas |
| EAN code | 8017709253691 |



Aesthetics



| | |
|-------------------------------|-----------------------------|
| Aesthetic | Linea |
| Colour | Silver |
| Acabamento | Glass |
| Material | Glass |
| Glass type | Standard (clear) |
| Glass edge | Angled edge |
| Glass on Steel | Yes |
| Frame | No |
| Série | Nova |
| Pan stands | Cast iron |
| Pan Stand Coating | No |
| Burners | Vertical flame, flat design |
| Burners Material | Alluminium |
| Burner Coating | No |
| Type of control setting | Control knobs |
| Control knob position | Front |
| No. of controls | 4 |
| Controls colour | Steel effect |
| Illuminated control knobs | No |
| Control knob protection | No |
| Serigraphy colour | White |
| Alternative colours available | White, Black |

Program / Functions

| | |
|-------------------------|---|
| No. of gas cook zones | 4 |
| Total no. of cook zones | 4 |

Options

| | | | |
|------------------|----|--------------|--------------------|
| Multizone Option | No | Corte padrão | 482-486x560-564 mm |
|------------------|----|--------------|--------------------|

Technical Features

| | | | |
|---|-----|--------------------|-----|
| Front-left - Gas - Semi Rapid - 1.70 kW | | | |
| Rear-left - Gas - Semi Rapid - 1.70 kW | | | |
| Rear-right - Gas - Rapid - 3.00 kW | | | |
| Front-right - Gas - AUX - 1.10 kW | | | |
| Gas safety valves | Yes | Automatic Ignition | Yes |

Accessories Included


| | |
|-------------------|----|
| Other accessories | No |
|-------------------|----|

Electrical Connection

| | | | |
|----------------------------------|--------------|------------------------------------|----------|
| Plug | No | Frequency (Hz) | 50/60 Hz |
| Electrical connection rating (W) | 1 W | Comprimento do cabo de alimentação | 120 cm |
| Voltage (V) | 220-240 V | Ficha elétrica | No |
| Type of electric cable | Single phase | | |

Gas Connection

| | | | |
|----------------------------|-----------------------------------|--------------------------------|---------|
| Gas Type | G20/G25 natural gas | Other gas connections provided | Conical |
| Ligação ao gás | Ligação ao gás cilíndrica | Gas connection rating (W) | 7500 W |
| Other gas nozzles included | G30 GPL Liquid gas, G110 City gas | | |

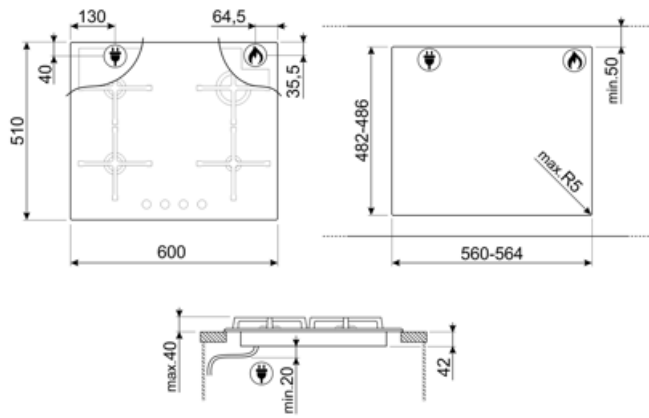

Compatible Accessories

5MP1GOG

Conjunto de botões para placa Botões de linha para placas de gás em vidro (5 botões)



Symbols glossary



Instalação padrão: Instalação tradicional em tampo de mesa, adequado para qualquer conjunto de cozinha



Base reforçada: Uma base reforçada, desenvolvida exclusivamente pela Smeg, consiste em uma camada de aço fixada à parte inferior da superfície de vidro de todo o gás em placas de vidro.



Controle dos botões



Suportes de ferro fundido para serviço pesado: para máxima estabilidade e resistência.



Queimadores direcionais: têm uma chama quase vertical que transfere energia real para o tacho.