


PV631CNX



| | |
|----------------|---------------|
| Product Family | Hob |
| Built-in type | Traditional |
| Dimensions | 38 cm |
| Power supply | Gas |
| Type | Gas |
| EAN code | 8017709221997 |

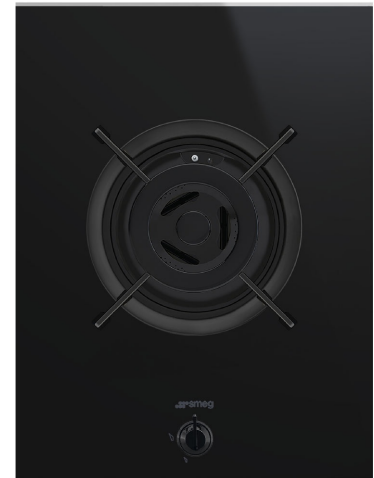

Aesthetics



| | |
|---------------------------|-----------------|
| Aesthetic | Dolce Stil Novo |
| Colour | Black |
| Acabamento | Glass |
| Material | Glass |
| Glass type | Ceramic |
| Glass on Steel | Yes |
| Pan stands | Cast iron |
| Pan Stand Coating | No |
| Burner Coating | Black Ceram |
| Type of control setting | Control knobs |
| Control knob position | Front |
| No. of controls | 1 |
| Controls colour | Black |
| Components finishing | Stainless Steel |
| Illuminated control knobs | No |
| Control knob protection | No |
| Serigraphy colour | Grey |

Program / Functions

| | |
|-------------------------|---|
| No. of gas cook zones | 1 |
| Total no. of cook zones | 1 |

Options

Corte padrão

482-486x252-256 mm

Technical Features

UR

Central - Gas - UR - 6.00 kW

Gas safety valves Yes Automatic Ignition Yes

Accessories Included


Cast iron wok support 1

Electrical Connection

| | | | |
|----------------------------------|-----------|------------------------------------|----------|
| Plug | No | Frequency (Hz) | 50/60 Hz |
| Electrical connection rating (W) | 1 W | Comprimento do cabo de alimentação | 120 cm |
| Voltage (V) | 220-240 V | Ficha elétrica | No |

Gas Connection

| | | | |
|----------------------------|---------------------------|--------------------------------|---------|
| Gas Type | G20 Natural gas | Other gas connections provided | Conical |
| Ligação ao gás | Ligação ao gás cilíndrica | Gas connection rating (W) | 6000 W |
| Other gas nozzles included | G30 GPL Liquid gas | | |

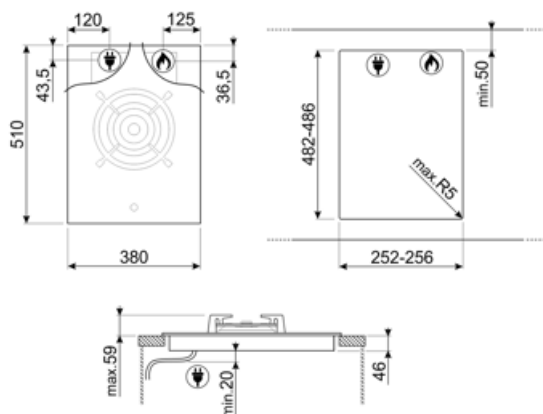

Compatible Accessories



GRM

Suporte moka para placas a gás



GRW

Suporte para wok



LGCN

Tira de ligação Placas embutidas, aço inoxidável, 475/495 mm



WOKGHU

Suporte de ferro fundido para WOK

Symbols glossary



Instalação padrão: Instalação tradicional em tampo de mesa, adequado para qualquer conjunto de cozinha



Controle dos botões



Queimadores ultrarrápidos: Queimadores ultrarrápidos potentes oferecem até 5kw de potência.



Suportes de ferro fundido para serviço pesado: para máxima estabilidade e resistência.



Base reforçada: Uma base reforçada, desenvolvida exclusivamente pela Smeg, consiste em uma camada de aço fixada à parte inferior da superfície de vidro de todo o gás em placas de vidro.