

PV695LCNR



Product Family	Hob
Built-in	Traditional
Dimensions	90 cm
Power supply	Gas
Type	Gas
EAN code	8017709222161



Aesthetics



Aesthetics	Dolce Stil Novo
Colour	Black
Finishing	Glass
Material	Glass
Glass Type	Ceramic
Glass on Steel	Yes
Pan stands	Cast iron
Burner Coating	Black Ceram
Type of control setting	Control knobs
Control knobs position	Front
No. of controls	5
Controls colour	Black
Components finishing	Copper
Serigraphy colour	Grey

Programs / Functions

No. of gas cook zones	5
Total no. of cook zones	5

Options



Standard cut out	482-486x844-848 mm
------------------	--------------------

Technical Features

UR

Left - Gas - UR - 6.00 kW

Rear centre - Gas - Semi Rapid - 1.70 kW

Front centre - Gas - Semi Rapid - 1.70 kW

Rear right - Gas - Rapid - 2.60 kW

Front right - Gas - AUX - 1.10 kW

Gas safety valves Yes Automatic Ignition Yes

Accessories Included


Cast iron wok support 1

Electrical Connection

Nominal power (W)	1 W	Frequency (Hz)	50/60 Hz
Voltage (V)	220-240 V	Power supply cable length	120 cm

Gas Connection

Gas Type	G20 Natural gas	Other gas connections provided	Conical
Gas connection	Cilindrical	Gas connection rating (W)	13100 W
Other gas nozzles included	G30 GPL Liquid gas		

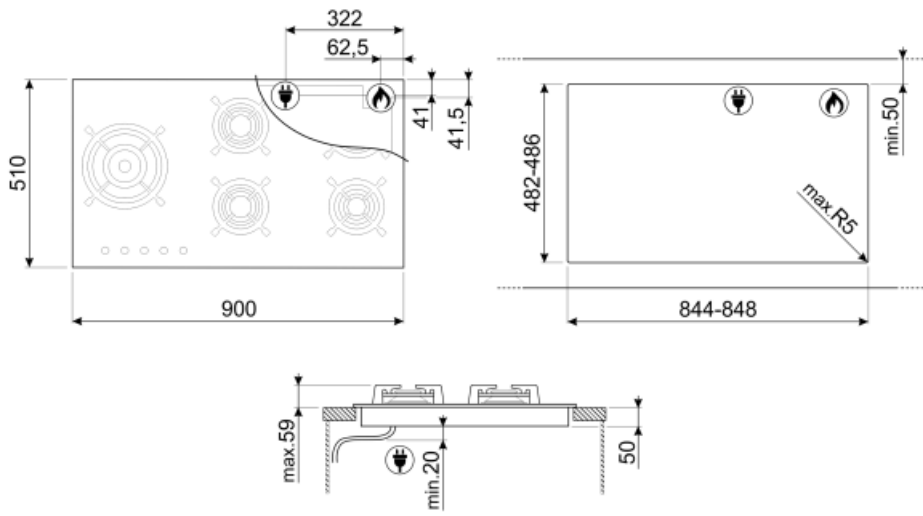

Not included accessories



GRW
Wok support



GRM
Gas hobs moka support









WOKGHU
Cast-Iron WOK Support



LGCN
Connecting Strip Built-in hobs,
stainless steel, 475/495 mm

Symbols glossary

- | | | | |
|--|--|---|---|
|  | Standard installation: Traditional installation in tabletop, suitable for any kitchen sets |  | Heavy duty cast iron pan stands: for maximum stability and strength. |
|  | Reinforced base: A reinforced base, developed exclusively by Smeg, consists of a steel layer fixed to the underside of the glass surface of all gas on glass hobs. |  | Ultra rapid burners: Powerful ultra rapid burners offer up to 5kw of power. |
|  | Small cut-out for easy installation |  | Knobs control |