

S8F174DNE



Product Family	Freezers
Installation	Built-in
Built-In Niche	178 cm
Category	Single door
Cooling type	No Frost
Hinge type	Door on door
Hinge position	Right
Reversible door	Yes



Aesthetics




Aesthetic	Universale	Logo	Silk screen
Colour	White	Drawers profile color	Silver
Side material	Metal	Display	LCD Touch
Side colour	White		

Freezer compartment features

Number of drawers	5
No. of compartments with flap	2

Other technical features



Freezer compartment accessories	Ice cube tray	No. of compressors	1
Functions display	Fast Freezing, Control lock, Temperature Alarm, Cooling timer	Refrigerant gas type	R600a
Fast freezing button	Yes	Type of compressor	Standard
Door open alarm	Yes	Refrigerant Quantity (g)	48 g
Temperature alarm	Yes	Foam agent	Cyclopentane
Type of temperature control	Electronic	Max weight door panel (freezer)	47 kg


Performance / Energy Label - Reg. 2019

E A B

Annual energy consumption	233 kWh/a	Temperature Rise Time	8.50 h
Total net volume	204 l	4 star - Freezing capacity	16.5 kg/24h
Energy efficiency class	E	Climate class	SN, N, ST, T
Airborne acoustical noise emission class	C	EEl	100 %
Sum of the volumes of the frozen compartment(s)	204 l		

Electrical Connection

Electrical connection rating	140 W	Frequency (Hz)	50 Hz
Current	1 A	Power supply cable length	240 cm
Voltage	230-240 V	Plug	(F;E) Schuko

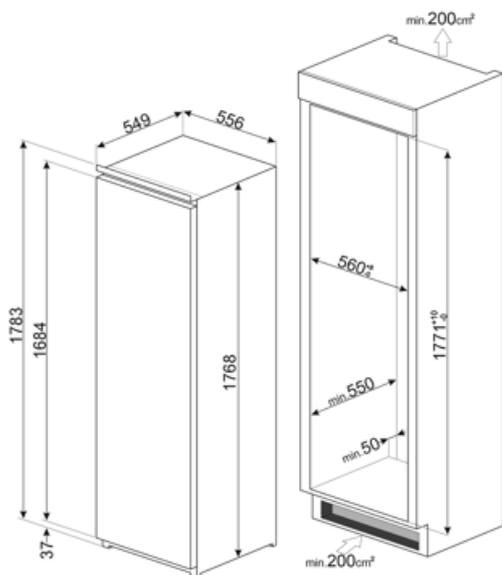

Symbols glossary

	4 stars freezing compartment for better food preservation.		Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.
	A++: Energy efficiency class A++ helps to save up to 20% energy compared to class A. Maximum performance with minimum consumption is guaranteed.		Energy efficiency class E
	LCD display: to optimize performance and simplify the use of the appliance.		Fast freezing: The fast freezing function brings the temperature of the compartment down when activated a few hours prior to usage.
	Built-in niche		No Frost: The No Frost and Frost free systems prevent ice from forming so that no defrosting is required.