

SA661X2



Product Family
Built-in type
Dimensions
Power supply
Type
EAN code

Hob
Ultra-low profile
60 cm
Electric
Ceramic
8017709265731



Aesthetics



Aesthetic	Classic
Colour	Black
Finishing	Glass
Material	Glass
Glass type	Ceramic
Glass edge	Angled edge
Type of control setting	Control knobs
Control knob position	Front
No. of controls	4
Controls colour	Steel effect
Logo	Silk screen
Serigraphy colour	Grey

Program / Functions

No. of ceramic cook zones	4
Total no. of cook zones	4

Options

Standard cut out	490x560 mm
-------------------------	------------

Technical Features

Front-left - Ceramic - Single - 1.80 kW - Ø 18.4 cm


Rear-left - Ceramic - Single - 1.20 kW - Ø 14.8 cm

Rear-right - Ceramic - Double - 1.00 - 2.20 kW - Ø 14.8 - Ø 21.4 cm

Front-right - Ceramic - Single - 1.20 kW - Ø 14.8 cm

Electrical Connection

Electrical connection rating (W)	6400 W	Type of electric cable supplied	Yes, Three and Single/Two-phase
Current	19 A	Frequency (Hz)	50/60 Hz
Voltage (V)	220-240 V	Power supply cable length	120 cm
Voltage 2 (V)	380-415 V	Terminal box	6 poles
Type of electric cable	Double universal	Plug	No

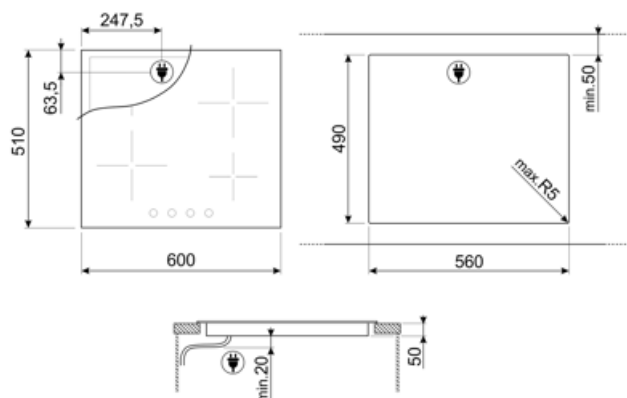






Compatible Accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper

Symbols glossary

- | | | | |
|----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
|  | Ultra-low profile: Installation of product with flat edge - height of 1 mm. |  | Knobs control |
|  | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit. |  | Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light. |
|  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. | | |