


SAI3964B





Product Family Hob
Built-in type Traditional
Dimensions 90 cm
Power supply Electric
Type Induction

EAN code 8017709305598



Aesthetics







AestheticUniversaleColourBlackFinishingGlassMaterialGlassGlass typeCeramicGlass edgeStraight edge

Type of control setting Touch control back-lighted White

Slider Yes
Control knob position Front
Serigraphy colour Grey

Program / Functions





No. of induction cook zones

Time-setting options Automatic Shutdown

No. of cooking zones with booster 6
No. of Flexible zones 3
Main on/off switch Yes
Power levels 9
Auto-vent 2.0 Sì
Total no. of cook zones 6

Options





























Multizone Option Yes Flexible Zone Type MultiZone 490x860 mm Standard cut out Multizone Option Yes

Multizone Option Yes Keep warm automatic Yes

function

Grill function Yes End cooking timer 6 Pause option Yes Minute minder 1

End of cooking alarm Yes Residual time indicator Yes Advanced Eco Logic

Limited Power Consumption Mode

Limited Power 4200, 4500, 5000, 5500, Consumption Mode in W 6000, 6500, 7000, 7200,

7400 W

Showroom Demo Option Yes Control Lock / Child Yes

Safety

Bridge option Yes Quick start Yes Rapid level selection Yes

Technical Features











Front-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm Rear-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm Front-centre - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm Rear-centre - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm

Front-right - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm Rear-right - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm

Multizone left - Booster 3.70 kW - 38.5x23.0 cm Multizone center - Booster 3.70 kW - 38.5x23.0 cm Multizone right - Booster 3.70 kW - 38.5x23.0 cm

Automatic setting Yes according to pan dimension Yes pan detection Permanent Automatic Yes Pot Detection with

indication of the relative control

Automatic switch off when overheat

Yes

Automatic switch off

when overflow

Residual heat indicator Yes Protection against Yes

accidental start up

Electrical Connection

Electrical connection

11100 W

rating (W)

Current 49 A Voltage (V) 220-240 V Voltage 2 (V) 380-415 V Type of electric cable

Type of electric cable

supplied

Frequency (Hz)

Double universal


Yes, Three and Single/Two-

phase

Yes

50/60 Hz



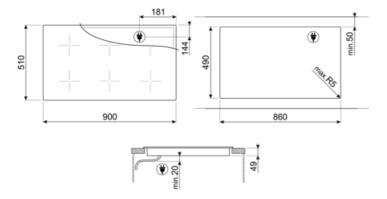



Compatible Accessories

GRILLPLATE



Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.

TPKPLATE



Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.



SCRP

Induction and ceramic hobs and teppanyaki scraper



Symbols glossary

 (\mathbf{P})

14 10

EVO

0	Automatic merge of zones for a bigger area

Power booster: option allows the zone to work at full power when very intense cooking is necessary.

Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.

Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.

Perfect fit in a 90 cm cabinet

Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.

Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.

Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).

Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.

Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.

Ilogic ... OYANCI

Evolution Slider totally Back-lighted ghost effect

0



Standard installation: Traditional installation in tabletop, suitable for any kitchen sets

The slider control panel allows you to adjust the power simply by passing your finger across the touch device.

Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.

÷ (Ö

Additional maximum power level for a better energy consumption

Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility

PAUSE_72dpi

Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.

Time elapsed: shows how long the cooking zone has been in use.

TWIN_ZONE_72dpi

Darkness becomes light