

SAI4634D



Product Family

Built-in type Ultra-low profile or Fully Flushed

Hob

Dimensions60 cmPower supplyElectricTypeInduction

EAN code 8017709302535



Aesthetics





AestheticUniversaleColourBlackFinishingGlassMaterialGlassGlass typeCeramicGlass edgeStraight edgeType of control settingCompact EVO Slider

Slider Yes
Slider Red
Control knob position Front

Control knob position Front Serigraphy colour Grey

Programs / Functions





Total no. of cook zones 3
No. of induction cook zones 3

Time-setting options Automatic Shutdown

No. of cooking zones with booster 3

No. of Flexible zones 1

Main on/off switch Yes

Power levels 9

Auto-vent 2.0 Si

Options



























Multizone Option Flexible Zone Type Standard cut out

MultiZone

Yes

478-482x555-560 mm

Multizone Option Yes **Multizone Option** Yes Keep warm automatic Yes function

Grill function Yes End cooking timer 3 Pause option Yes Minute minder 1

End of cooking alarm Yes Residual time indicator Yes

Limited Power Advanced Eco Logic Consumption Mode

Limited Power 2400 a 7400 - step 100 W Consumption Mode in W

Showroom Demo Option Yes Control Lock / Child Yes

Safety

Bridge option Yes Cleaning option Yes Quick start Yes Rapid level selection Yes

Technical Features















Front-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 22.0x18.0 cm Rear-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 22.0x18.0 cm

Right - Induction - Single - 2.30 kW - Booster 3.00 kW - - Ø 25.0 cm

Multizone left - Booster 3.70 kW - 38.5x23.0 cm

Automatic setting according to pan

dimension

pan detection Yes, min 9 cm

Permanent Automatic Pot Detection with indication of the relative

control

rating (W)

Automatic switch off

when overheat

Yes

Yes

Yes

Automatic switch off Yes

when overflow

Residual heat indicator Yes Eco-Heat Yes **Protection against** Yes

accidental start up

Electrical Connection

Electrical connection

Current 30 A Voltage (V) 220-240 V Voltage 2 (V) 380-415 V

Type of electric cable Single phase

6700 W

Type of electric cable

Frequency (Hz) Power supply cable

length

Terminal box

Yes, Double and Three


Phase 50/60 Hz

150 cm

6 poles

6/05/2024 **SMEG SPA**



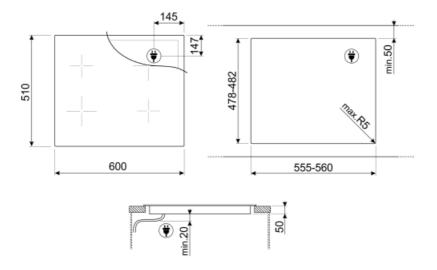



Not included accessories

GRILLPLATE



Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.

TPKPLATE



Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.



SCRP

Induction and ceramic hobs and teppanyaki scraper



Symbols glossary (TT)

O	Automatic merge of zones for a bigger area	O	
△		P	Power booster: option allows the zone to work at full power when very intense cooking is necessary.
δ	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.	COMPACT PLUS Slider	Compact Slider back-lighted ghost effect
19	The slider control panel allows you to adjust the power simply by passing your finger across the touch device.	48 56	CUT_OUT_STANDARD_72dpi
BOOST	Additional maximum power level for a better energy consumption	ECO HEAT ==-	Eco-Heat: this function warns when the zone is still hot after being switched off. As well as ensuring maximum safety by preventing burns, this also allows you to make use of residual heat to continue cooking or keep foods hot.
<u>"</u>	Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.	STOP °C∓	Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.
	Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.	; ⊙	Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility
*	Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.	(1)	PAUSE_72dpi
† P 14 † 10 † 5	Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).	4	Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.
}- {	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.	<u>O</u>	Time elapsed: shows how long the cooking zone has been in use.
(%)	Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.		TWIN_ZONE_72dpi