# SBC4104G

| | |
|---|---|
| **Product Family** | Blast chiller |
| **Category** | 45cm compact |
| **Vitality system** | Yes |
| **Power supply** | Electric |
| **Heat source** | Electric |
| **Cooling type** | Fan assisted |



## Aesthetics

| | | | |
|---|---|---|---|
| **Aesthetic** | Linea | **Glass Type** | Clear1 |
| **Colour** | Neptune Grey | **Serigraphy colour** | Black |
| **Finishing** | Matt | **Door** | Full glass |
| **Design** | Flat | **Handle** | Linea minimal |
| **Material** | Glass | **Handle Colour** | Satin metal and black |
| **Alternative colours available** | Stainless steel, Pure Black, Neptune Grey, Nero Lucido | **Logo** | Silk screen |

## Program / Functions

| | |
|---|---|
| **Automatic programmes** | 8 |
| **No. of warming functions** | 6 |
| **N. cold functions** | 5 |
| **Automatic cleaning** | |
| **Customisable recipes** | 100 |

**Cold functions**

- Bottles Cooling
- Cooling
- Deep Freezing
- Pre-cooling
- Preservation

**Warming functions**

- Low Temperature Cooking
- Proving
- Ready to eat
- Defrosting
- Heating
- Yoghurt

| | |
|---|---|
| **Multi-step** | Yes, up to 2 functions |

## Controls

| | | | |
|---|---|---|---|
| **Display / Clock** | TFT graphic , colour touch screen | **Control setting** | Touch control |

## Options

| | | | |
|---|---|---|---|
| **Door open alarm** | Yes | **Cooling with probe** | Yes |
| **Minute minder** | Yes | **Showroom demo option** | Yes |
| **Timer** | 2 | **Tones** | Polyphonic |
| **Controls Lock / Child Safety** | Yes | **Chronology** | Yes, the last 10 functions utilized |
| **Cooking with probe thermometer** | Yes | **Touch guide** | Sì, a pressione prolungata su display |

## Technical Features

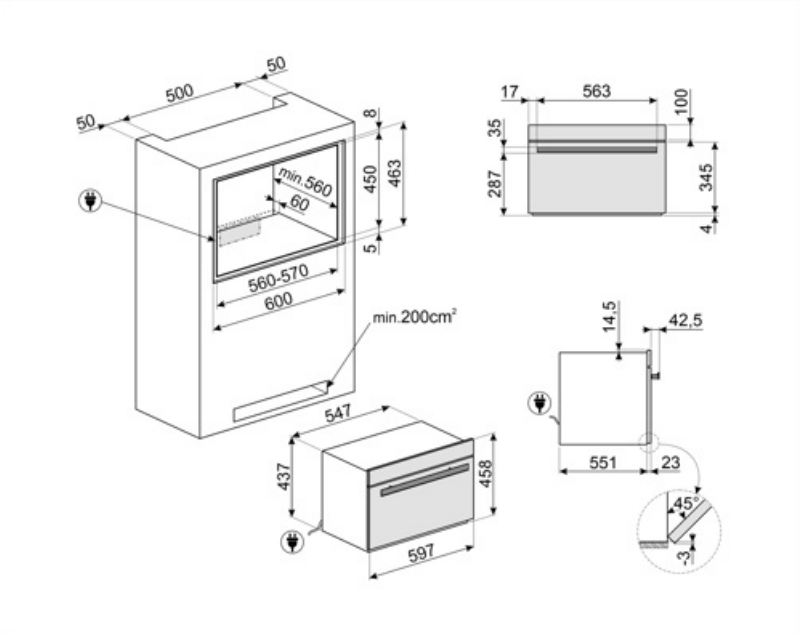
| | | | |
|---|---|---|---|
| **Compressor type** | Standard | **No. of lights** | 1 |
| **Refrigerant gas type** | R290 | **Light type** | LED |
| **Refrigerant Quantity** | 58 g | **Light Power** | 1 W |
| **Climatic class** | SN, N, ST, T | **Light when door is opened** | Yes |
| **Temperature control** | Electronic | **Upper heating element - Power** | 250 W |
| **Minimum Temperature** | -28 °C | **Door opening type** | Standard opening |
| **Maximum temperature** | 75 °C | **Safety Thermostat** | Yes |
| **Cavity material** | Stainless steel | **Heating suspended when door is opened** | Yes |
| **No. of shelves** | 3 | **Gross volume** | 34 l |
| **Shelves type** | Metal racks | | |

## Accessories Included

| | | | |
|---|---|---|---|
| **Bottle rack grid** | Yes | **Other** | Microfiber cloth |
| **Temperature probe** | Yes | | |

## Electrical Connection

| | | | |
|---|---|---|---|
| **Voltage** | 220-240 V | **Current** | 2,5 A |
| **Plug** | (F;E) Schuko | **Frequency (Hz)** | 50 Hz |
| **Electrical connection rating (W)** | 270 W | **Power supply cable length** | 200 cm |


500
50
50
8
450
463
5
min.560
60
560-570
600
min.200cm²
547
437
458
597
17
563
100
35
287
345
4
14,5
42,5
551
23
45°
3

## Alternative products



**SBC4104B3**

**Colour:** Black

## Symbols glossary



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



Cold storage: allows to keep the food at the desired temperature between -35°C and +75°C and serve it at its best to enhance flavours and aromas.



Bottles cooling: is possible to quickly cool wine and beverage bottles, reducing the need for storage in the refrigerator, with considerable space savings. Cooling of beverages takes place at about 1°C per minute.



Electric




Compact appliances with a height of 45 cm - perfect solution to meet the functional requirements of kitchen sets of small height. Available in several types and in different styles.




The capacity indicates the amount of usable space in the oven cavity in litres.



Low temperature cooking: This function consists in cooking food at a constant temperature, lower than the traditional cooking temperature. Meat results more tender and juicy, maintaining a softness that only this cooking technique allows to obtain.



Cooling: It allows to quickly cool the food, from the temperature of 80/90°C to 3°C in less than 90 minutes, to prevent bacterial growth, prolong the average life of food and maintain unaltered the quality of food.



Pre-cooling: allows the cavity to cool to -30 °C before inserting food into the blast chiller, to ensure the best cooling and freezing results. It is recommended to run a 15-minute pre-cooling cycle.



Deep freezing of the food is a very quick process (From 0/90°C temperature to -18°C in less than 270 min) that allows to extend the average life of food (by up to 70% more) and keep the same organoleptic and nutritional characteristics of fresh food, because it avoid the formation of macro-crystals, that ruin the fibers of the food.



Automatic cleaning: a drying cycle of the cavity to be run with the door open, to eliminate any condensation formed during use.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



Ready to eat: This function allows to keep food safely at the refrigerator temperature throughout the day, and heat it just before your return to make it warm, ready to be consumed.



Dough leavening/ Yogurt: this function allows you to create the perfect conditions for correct leavening, keeping the mixture at controlled temperatures for the desired time, avoiding sudden changes in humidity levels. This feature also allows the creation of genuine homemade yogurt.