


SE232TD1



Product Family	Hob
Built-in	Ultra-low profile or Fully Flushed
Dimensions	30 cm
Power supply	Electric
Type	Ceramic
EAN code	8017709312022

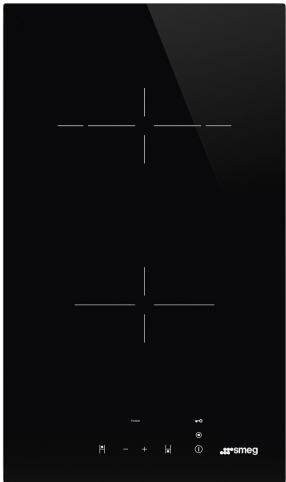

Aesthetics



Aesthetics	Universal
Colour	Black
Finishing	Glass
Material	Glass
Glass Type	Ceramic
Glass edge	Straight edge
Type of control setting	Digi Touch
Slider	Red
Control knobs position	Front
Logo	Silk screen
Serigraphy colour	Grey

Program / Functions

No. of ceramic cook zones	2
Main on/off switch	Yes
Power levels	9
Total no. of cook zones	2

Options



Standard cut out	490x270 mm	Show Room Demo	Yes
End cooking timer	2	Option	
Minute minder	1		

Control Lock / Child Safety	Yes
-----------------------------	-----

Technical Features



Rear centre - Ceramic - double - 1.70 kW - Ø 12.0 - Ø 18.0 cm

Front centre - Ceramic - single - 1.20 kW - Ø 14.5 cm

Automatic switch off when overheat Yes

Residual heat indicator Yes

Automatic switch off when overflow Yes

Electrical Connection

Nominal power (W) 2900 W

Current 13 A

Voltage (V) 220-240 V


Type of electric cable Single and Double phase

Frequency (Hz) 50/60 Hz

Power supply cable length 130 cm

Terminal Box 3 poles

Plug No

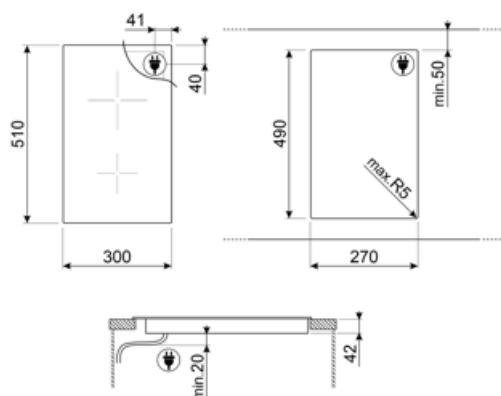

Compatible Accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper

Symbols glossary



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



Touch control



Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.