

SE232TD1



| | |
|----------------|------------------------------------|
| Product Family | Hob |
| Built-in type | Ultra-low profile or Fully Flushed |
| Dimensions | 30 cm |
| Power supply | Electric |
| Type | Ceramic |
| EAN code | 8017709312022 |



Aesthetics



| | |
|-------------------------|---------------|
| Aesthetic | Universale |
| Colour | Black |
| Finishing | Glass |
| Material | Glass |
| Glass type | Ceramic |
| Glass edge | Straight edge |
| Type of control setting | Digi Touch |
| LED colours | Red |
| Control knob position | Front |
| Logo | Silk screen |
| Serigraphy colour | Grey |

Program / Functions

| | |
|---------------------------|-----|
| No. of ceramic cook zones | 2 |
| Main on/off switch | Yes |
| Power levels | 9 |
| Total no. of cook zones | 2 |

Options



| | | | |
|-------------------|------------|----------------------|-----|
| Worktop Cut-Out | 490x270 mm | Showroom Demo Option | Yes |
| End cooking timer | 2 | | |
| Minute minder | 1 | | |

Control Lock / Child Safety Yes

Technical Features



Rear-centre - Ceramic - Double - 1.70 kW - Ø 12.0 - Ø 18.0 cm

Front-centre - Ceramic - Single - 1.20 kW - Ø 14.5 cm


Automatic switch off when overheat Yes

Residual heat indicator Yes

Automatic switch off when overflow Yes

Electrical Connection

| | | | |
|----------------------------------|------------------------------|---------------------------|-------------|
| Electrical connection rating (W) | 2900 W | Frequency (Hz) | 50/60 Hz |
| Current | 13 A | Power supply cable length | 130 cm |
| Voltage (V) | 220-240 V | Terminal box | 3 poles |
| Type of electric cable installed | Yes, Single and Double phase | Plug | Not present |

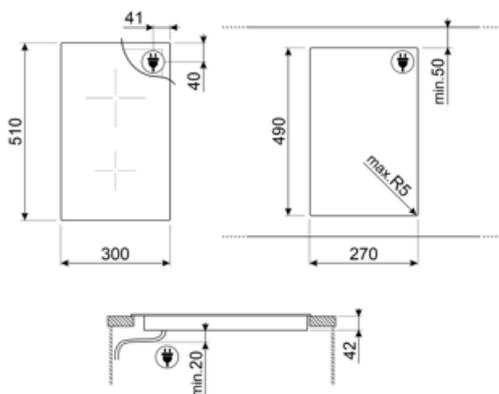

Compatible Accessories



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

Symbols glossary

- | | | | |
|--|---|---|---|
|  | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed. |  | Touch control |
|  | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit. |  | Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light. |
|  | Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids. |  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |
|  | Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time. | | |