SE232TD2

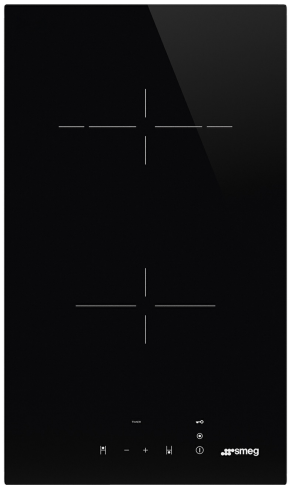

Product Family	Hob
Built-in type	Ultra-low profile or Fully Flushed
Dimensions	30 cm
Power supply	Electric
Type	Ceramic
EAN code	8017709358235

Aesthetics

Aesthetic	Universale
Colour	Black
Finishing	Glass
Material	Glass
Glass type	Ceramic
Glass edge	Straight edge
Type of control setting	Digi Touch
LED colours	Red
Control knob position	Front
Logo	Silk screen
Serigraphy colour	Grey

Program / Functions

No. of ceramic cook zones	2
No. of cooking zones with booster	2
Main on/off switch	Yes
Power levels	9
Total no. of cook zones	2

Options

Worktop Cut-Out	490x270 mm	**Minute minder**	1
End cooking timer	2	**Control Lock / Child Safety**	Yes

Technical Features

Front-centre - Ceramic - Single - 1.2 kW - 14 cm

Rear-centre - Ceramic - Double - 1.7 kW - 12 - 18 cm

Automatic switch off when overheat	Yes	**Residual heat indicator**	Yes
Automatic switch off when overflow	Yes		

Electrical Connection

Electrical connection rating (W)	2900 W	**Frequency (Hz)**	50-60 Hz
Current	12.5 A	**Power supply cable length**	130 cm
Voltage (V)	220 V	**Terminal box**	3 poles
Voltage 2 (V)	240 V	**Plug**	Not present
Type of electric cable installed	Yes, Single phase		

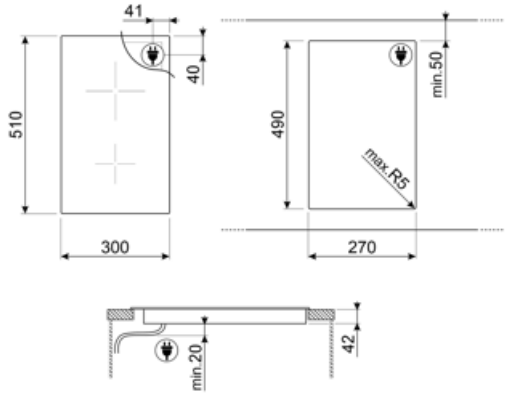

Compatible Accessories



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

Symbols glossary



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Touch control