

SE263TD1



Product Family	Hob
Built-in type	Ultra-low profile or Fully Flushed
Dimensions	60 cm
Power supply	Electric
Type	Ceramic
EAN code	8017709312046



Aesthetics



Aesthetic	Universal
Colour	Black
Acabamento	Glass
Material	Glass
Glass type	Ceramic
Glass edge	Straight edge
Type of control setting	Touch controls
Comandos Slider	Vermelho
Control knob position	Front
Serigraphy colour	Grey

Program / Functions

No. of ceramic cook zones	3
Main on/off switch	Yes
Power levels	9
Total no. of cook zones	3

Options



Corte padrão	490x560 mm	Minute minder	1
Auto-boiling Function	No	End of cooking alarm	Yes
Simmering Function	No	Residual time indicator	Yes

Keep warm automatic function	No	Limited Power Consumption Mode	No
Melting/Low temperature cooking function	No	Showroom Demo Option	Yes
End cooking timer	3	Control Lock / Child Safety	Yes
Pause option	No		

Technical Features




Rear-left - Ceramic - Single - 1.80 kW - Ø 18.0 cm
 Front-left - Ceramic - Single - 1.20 kW - Ø 14.5 cm
 Centre-right - Ceramic - Double - 2.40 kW - Ø21.0 - Ø 27.0 cm

Automatic switch off when overheat	Yes	Residual heat indicator	Yes
Automatic switch off when overflow	Yes		

Electrical Connection

Plug	No	Type of electric cable	Single and Double phase
Electrical connection rating (W)	5400 W	Frequency (Hz)	50/60 Hz
Current	25 A	Comprimento do cabo de alimentação	130 cm
Voltage (V)	220-240 V	Placa de bornes	4 poli
Voltage 2 (V)	380-415 V	Ficha eléctrica	No

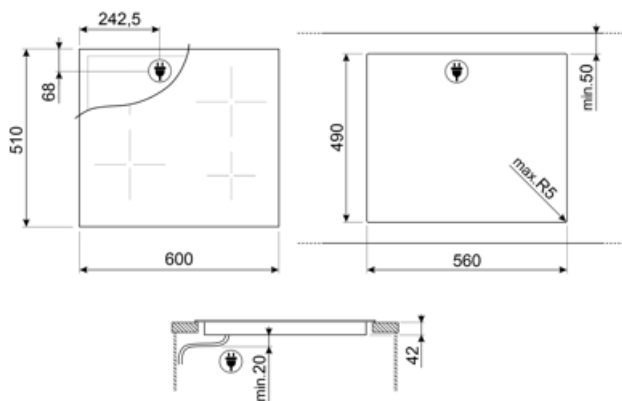









Compatible Accessories



SCRP

Placas de indução e de cerâmica e raspador teppanyaki

Symbols glossary

	Bloqueio para crianças: alguns modelos estão equipados com um dispositivo para bloquear o programa/ciclo para que não possa ser acidentalmente alterado.		Touch Control
	Protecção contra o sobreaquecimento: O sistema de segurança que desliga automaticamente a placa em caso de sobreaquecimento da unidade de controle.		Vidro cerâmico: A base da placa é feita de cerâmica de vidro. O aquecimento é realizado pelos elementos de aquecimento Hi-Light.
	Protecção especial contra transbordamento: A protecção especial contra transbordamento desliga o fogão na presença de transbordamento de líquidos.		Indicação de calor residual: Depois de a placa de cerâmica de vidro ter sido desligada, o indicador de calor residual mostra qual das zonas de aquecimento ainda permanece quente. Quando a temperatura cai abaixo de 60°C, o indicador se apaga.
	Tempo decorrido: mostra há quanto tempo a zona de cozedura está em uso.		Temporizador: Todas as placas de cerâmica têm um temporizador que termina automaticamente o cozimento após um tempo predefinido.