

# SE264TD1



<b>Product Family</b>	Hob
<b>Built-in</b>	Ultra-low profile or Fully Flushed
<b>Dimensions</b>	60 cm
<b>Power supply</b>	Electric
<b>Type</b>	Ceramic
<b>EAN code</b>	8017709312039



## Aesthetics



<b>Aesthetics</b>	Universal
<b>Colour</b>	Black
<b>Finishing</b>	Glass
<b>Material</b>	Glass
<b>Glass Type</b>	Ceramic
<b>Glass edge</b>	Straight edge
<b>Type of control setting</b>	Digi Touch
<b>Slider</b>	Red
<b>Control knobs position</b>	Front
<b>Logo</b>	Silk screen
<b>Serigraphy colour</b>	Grey

## Program / Functions

<b>No. of ceramic cook zones</b>	4
<b>Main on/off switch</b>	Yes
<b>Power levels</b>	9
<b>Total no. of cook zones</b>	4

## Options



<b>Standard cut out</b>	490x560 mm	<b>Residual time indicator</b>	Yes
<b>End cooking timer</b>	4		
<b>Minute minder</b>	1		

End of cooking acoustic alarm	Yes	Show Room Demo Option	Yes
		Control Lock / Child Safety	Yes

## Technical Features




Rear left - Ceramic - single - 2.10 kW - Ø 21.0 cm  
 Front left - Ceramic - single - 1.20 kW - Ø 14,5 cm  
 Rear right - Ceramic - single - 1.80 kW - Ø 18.0 cm  
 Front right - Ceramic - single - 1.20 kW - Ø 14.5 cm

Automatic switch off when overheat	Yes	Residual heat indicator	Yes
Automatic switch off when overflow	Yes		

## Electrical Connection

Nominal power (W)	6300 W	Frequency (Hz)	50/60 Hz
Current	27 A	Power supply cable length	130 cm
Voltage (V)	220-240 V	Terminal Box	4 poli
Voltage 2 (V)	380-415 V	Plug	No
Type of electric cable	Single and Double phase		

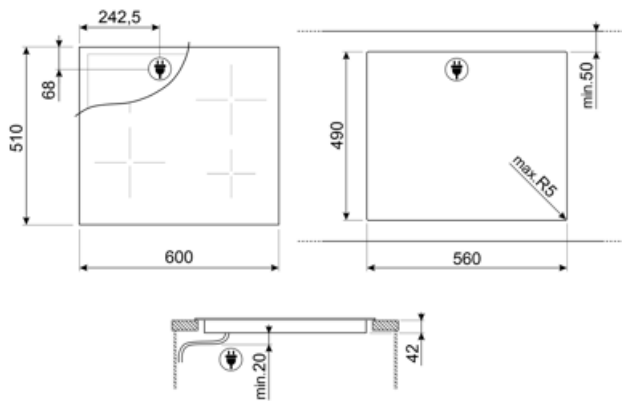

---

## Compatible Accessories









---



### SCRP

Induction and ceramic hobs and teppanyaki scraper

## Symbols glossary

	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.		Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.
	Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.		Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.
	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.		Time elapsed: shows how long the cooking zone has been in use.
	Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.		Touch control