

SE264TD1



| | |
|----------------|------------------------------------|
| Product Family | Hob |
| Built-in type | Ultra-low profile or Fully Flushed |
| Dimensions | 60 cm |
| Power supply | Electric |
| Type | Ceramic |
| EAN code | 8017709312039 |



Aesthetics



| | |
|-------------------------|---------------|
| Aesthetic | Universale |
| Colour | Black |
| Finishing | Glass |
| Material | Glass |
| Glass type | Ceramic |
| Glass edge | Straight edge |
| Type of control setting | Digi Touch |
| LED colours | Red |
| Control knob position | Front |
| Logo | Silk screen |
| Serigraphy colour | Grey |

Program / Functions

| | |
|---------------------------|-----|
| No. of ceramic cook zones | 4 |
| Main on/off switch | Yes |
| Power levels | 9 |
| Total no. of cook zones | 4 |

Options



| | | | |
|-------------------|------------|-------------------------|-----|
| Worktop Cut-Out | 490x560 mm | Residual time indicator | Yes |
| End cooking timer | 4 | Showroom Demo Option | Yes |
| Minute minder | 1 | | |

| | | | |
|----------------------|-----|-----------------------------|-----|
| End of cooking alarm | Yes | Control Lock / Child Safety | Yes |
|----------------------|-----|-----------------------------|-----|

Technical Features




Rear-left - Ceramic - Single - 2.10 kW - Ø 21.0 cm
 Front-left - Ceramic - Single - 1.20 kW - Ø 14,5 cm
 Rear-right - Ceramic - Single - 1.80 kW - Ø 18.0 cm
 Front-right - Ceramic - Single - 1.20 kW - Ø 14.5 cm

| | | | |
|------------------------------------|-----|-------------------------|-----|
| Automatic switch off when overheat | Yes | Residual heat indicator | Yes |
| Automatic switch off when overflow | Yes | | |

Electrical Connection

| | | | |
|----------------------------------|------------------------------|---------------------------|-------------|
| Electrical connection rating (W) | 6300 W | Frequency (Hz) | 50/60 Hz |
| Current | 27 A | Power supply cable length | 130 cm |
| Voltage (V) | 220-240 V | Terminal box | 4 poli |
| Voltage 2 (V) | 380-415 V | Plug | Not present |
| Type of electric cable installed | Yes, Single and Double phase | | |

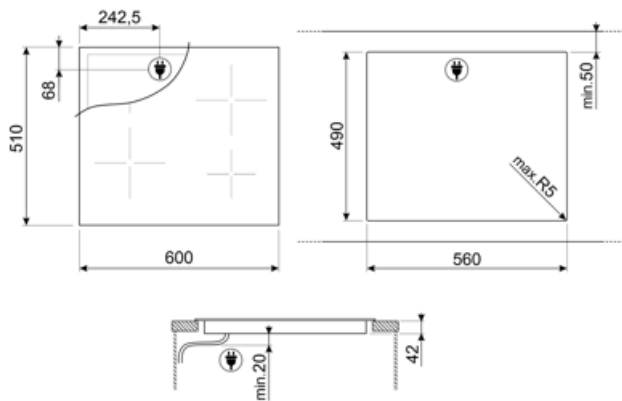









Compatible Accessories



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

Symbols glossary

| | | | |
|--|---|---|---|
|  | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed. |  | Touch control |
|  | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit. |  | Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light. |
|  | Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids. |  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |
|  | Time elapsed: shows how long the cooking zone has been in use. |  | Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time. |