


## SE332EB



### Product Family

Built-in	Hob
Dimensions	Ultra-low profile
Power supply	30 cm
Type	Electric
EAN code	Ceramic
	8017709233723

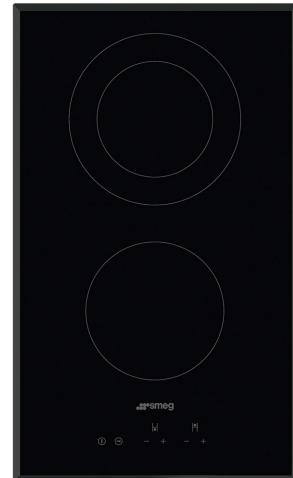

## Aesthetics



### Aesthetics

Colour	Universal
Finishing	Black
Material	Glass
Glass Type	Glass
Glass edge	Ceramic
Type of control setting	Angled edge
Control knobs position	Digi Touch
Logo	Front
Serigraphy colour	Silk screen
	Grey

## Program / Functions



No. of ceramic cook zones	2
No. of cooking zones with booster	2
Main on/off switch	Yes
Power levels	9
Total no. of cook zones	2

## Options



### Standard cut out

490x270 mm

Keep warm automatic function	Yes	Control Lock / Child Safety	Yes
Show Room Demo Option	Yes	Quick start	Yes

## Technical Features



Front centre - Ceramic - single - 1.20 kW - Ø 14.8 cm


Rear centre - Ceramic - double - 0.70 - 1.70 kW - Ø 12.4 - Ø 18.4 cm

**Automatic switch off when overheated** Yes **Residual heat indicator** Yes

**Automatic switch off when overflow** Yes

## Electrical Connection

<b>Nominal power (W)</b>	2900 W	<b>Frequency (Hz)</b>	50/60 Hz
<b>Current</b>	13 A	<b>Power supply cable length</b>	150 cm
<b>Voltage (V)</b>	220-240 V	<b>Terminal Box</b>	3 poles
<b>Type of electric cable</b>	Single phase	<b>Plug</b>	No

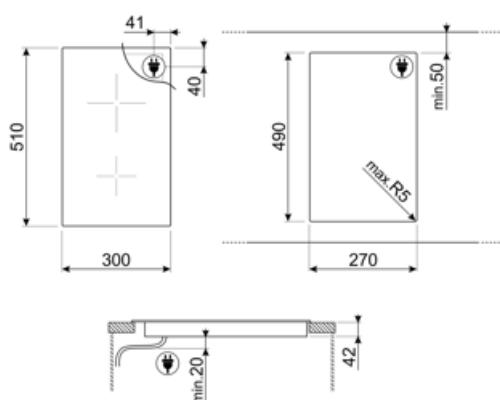

---

## Compatible Accessories

---



**SCRP**

Induction and ceramic hobs and teppanyaki scraper

## Symbols glossary

	Power booster: option allows the zone to work at full power when very intense cooking is necessary.		Ultra-low profile: Installation of product with flat edge - height of 1 mm.
	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.		Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.
	Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.		Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.
	Overflow protection: The special overflow protection shuts down the stove in the presence of overflow of liquids.		Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.
	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.		Touch control