


## SE364EMTB

**Product Family**

|                      |                   |
|----------------------|-------------------|
| <b>Built-in type</b> | Hob               |
| <b>Dimensions</b>    | Ultra-low profile |
| <b>Power supply</b>  | 60 cm             |
| <b>Type</b>          | Electric          |
| <b>EAN code</b>      | Ceramic           |
|                      | 8017709234768     |

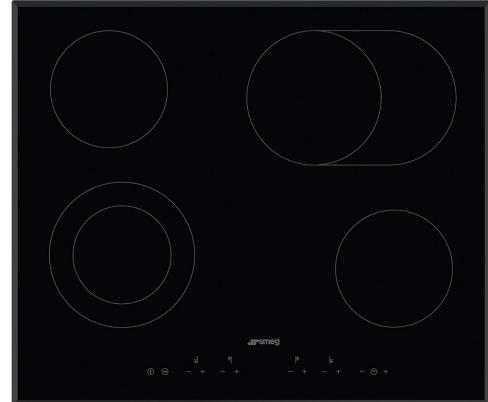

## Aesthetics



|                                |             |
|--------------------------------|-------------|
| <b>Aesthetic</b>               | Universale  |
| <b>Colour</b>                  | Black       |
| <b>Finishing</b>               | Glass       |
| <b>Material</b>                | Glass       |
| <b>Glass type</b>              | Ceramic     |
| <b>Glass edge</b>              | Angled edge |
| <b>Type of control setting</b> | Digi Touch  |
| <b>Control knob position</b>   | Front       |
| <b>Logo</b>                    | Silk screen |
| <b>Serigraphy colour</b>       | Grey        |

## Program / Functions



|  |     |
|--|-----|
| <b>No. of ceramic cook zones</b>         | 4   |
| <b>No. of cooking zones with booster</b> | 4   |
| <b>Main on/off switch</b>                | Yes |
| <b>Power levels</b>                      | 9   |
| <b>Total no. of cook zones</b>           | 4   |

## Options

**Worktop Cut-Out**

490x560 mm

|                              |     |                                     |              |
|------------------------------|-----|-------------------------------------|--------------|
| Keep warm automatic function | Yes | Limited Power Consumption Mode      | Yes          |
| End cooking timer            | 4   | Limited Power Consumption Mode in W | 2800, 4000 W |
| Minute minder                | 1   | Showroom Demo Option                | Yes          |
| End of cooking alarm         | Yes | Control Lock / Child Safety         | Yes          |
| Residual time indicator      | Yes | Quick start                         | Yes          |

## Technical Features



Front-left - Ceramic - Double - 0.80 - 2.00 kW - Ø 12.4 - Ø 18.4 cm

Rear-left - Ceramic - Single - 1.20 kW - Ø 14.8 cm

Rear-right - Ceramic - Extendable - 1.10 - 2.00 kW - Ø 14.8 - 25.3x14.8 cm

Front-right - Ceramic - Single - 1.20 kW - Ø 14.8 cm


Automatic switch off when overheated

Residual heat indicator Yes

Automatic switch off when overflow

## Electrical Connection

|                                  |                   |                                  |                             |
|----------------------------------|-------------------|----------------------------------|-----------------------------|
| Electrical connection rating (W) | 6400 W            | Additional connection modalities | Yes, Double and Three Phase |
| Current                          | 19 A              | Frequency (Hz)                   | 50/60 Hz                    |
| Voltage (V)                      | 220-240 V         | Power supply cable length        | 150 cm                      |
| Voltage 2 (V)                    | 380-415 V         | Terminal box                     | 6 poles                     |
| Type of electric cable installed | Yes, Single phase | Plug                             | Not present                 |

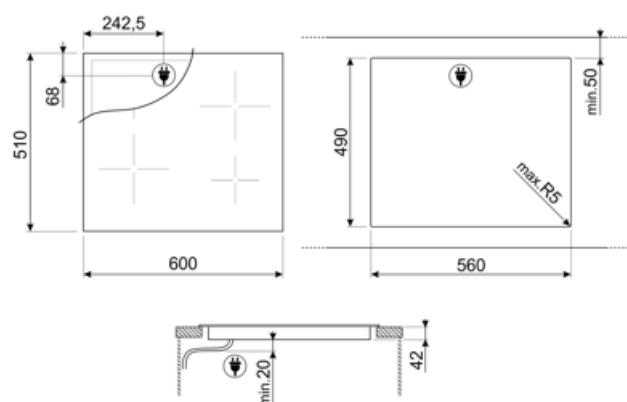

---

## Compatible Accessories

---



**SCRP**

Non-scratch hob scraper - suitable for induction and ceramic hobs

## Symbols glossary

|  |  |   |   |
|--|--|---|---|
|    | Power booster: option allows the zone to work at full power when very intense cooking is necessary.  |    | Ultra-low profile: Installation of product with flat edge - height of 1 mm.   |
|    | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.                                 |    | ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.   |
|    | This function allows you to keep cooked food warm without burner it  |    | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.   |
|    | Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.                                   |    | Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.   |
|    | Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached. |    | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |
|  | Time elapsed: shows how long the cooking zone has been in use.   |  | Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.  |
|  | Touch control  |   |   |