


SE364ETBM



Product Family
Built-in type
Dimensions
Power supply
Type
EAN code

Hob
Ultra-low profile
60 cm
Electric
Ceramic
8017709240882

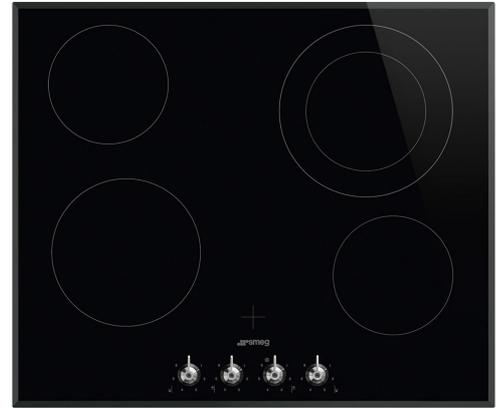

Aesthetics



| | |
|-------------------------|---------------|
| Aesthetic | Classic |
| Colour | Black |
| Finishing | Glass |
| Material | Glass |
| Glass type | Ceramic |
| Glass edge | Angled edge |
| Type of control setting | Control knobs |
| Control knob position | Front |
| No. of controls | 4 |
| Controls colour | Steel effect |
| Logo | Silk screen |
| Serigraphy colour | Grey |

Program / Functions

| | |
|---------------------------|---|
| No. of ceramic cook zones | 4 |
| Total no. of cook zones | 4 |

Options

| | |
|------------------|------------|
| Standard cut out | 490x560 mm |
|------------------|------------|

Technical Features

Front-left - Ceramic - Single - 1.80 kW - Ø 18.4 cm


Rear-left - Ceramic - Single - 1.20 kW - Ø 14.8 cm

Rear-right - Ceramic - Double - 1.00 - 2.20 kW - Ø 14.8 - Ø 21.4 cm

Front-right - Ceramic - Single - 1.20 kW - Ø 14.8 cm

Electrical Connection

| | | | |
|---|------------------|--|---------------------------------|
| Electrical connection rating (W) | 6400 W | Type of electric cable supplied | Yes, Three and Single/Two-phase |
| Current | 19 A | Frequency (Hz) | 50/60 Hz |
| Voltage (V) | 220-240 V | Power supply cable length | 150 cm |
| Voltage 2 (V) | 380-415 V | Terminal box | 6 poles |
| Type of electric cable | Double universal | Plug | No |

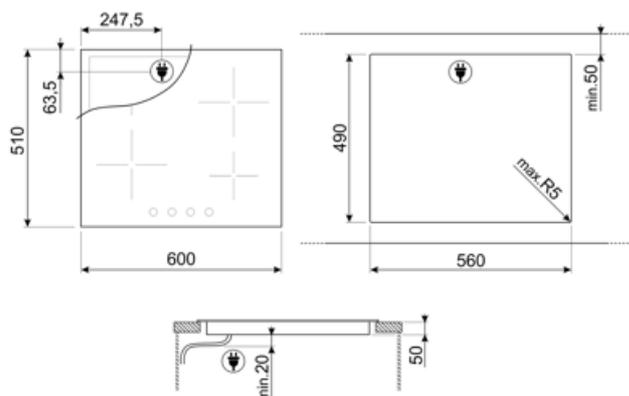

Compatible Accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper

Symbols glossary

| | | | |
|--|---|---|--|
|  | Ultra-low profile: Installation of product with flat edge - height of 1 mm. |  | Knobs control |
|  | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit. |  | Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light. |
|  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. | | |