

# SE364ETBM



Product Family  
Built-in type  
Dimensions  
Power supply  
Type  
EAN code

Hob  
Ultra-low profile  
60 cm  
Electric  
Ceramic  
8017709240882



## Aesthetics



Aesthetic	Classica
Colour	Black
Acabamento	Glass
Material	Glass
Glass type	Ceramic
Glass edge	Angled edge
Frame	No
Type of control setting	Control knobs
Slider	No
Control knob position	Front
No. of controls	4
Controls colour	Steel effect
Illuminated control knobs	No
Control knob protection	No
Serigraphy colour	Grey
Alternative colours available	No

## Program / Functions

No. of ceramic cook zones	4
Total no. of cook zones	4

## Options

Corte padrão	490x560 mm
--------------	------------

## Technical Features

Front-left - Ceramic - Single - 1.80 kW - Ø 18.4 cm

Rear-left - Ceramic - Single - 1.20 kW - Ø 14.8 cm


Rear-right - Ceramic - Double - 1.00 - 2.20 kW - Ø 14.8 - Ø 21.4 cm

Front-right - Ceramic - Single - 1.20 kW - Ø 14.8 cm

Automatic switch off when overflow No

## Electrical Connection

Plug	No	Type of electric cable	Double universal
Electrical connection rating (W)	6400 W	Type of electric cable supplied	Yes, Three and Single/Two-phase
Current	19 A	Frequency (Hz)	50/60 Hz
Voltage (V)	220-240 V	Comprimento do cabo de alimentação	150 cm
Voltage 2 (V)	380-415 V	Placa de bornes	6 polos
Type of electric cable	No	Ficha elétrica	No

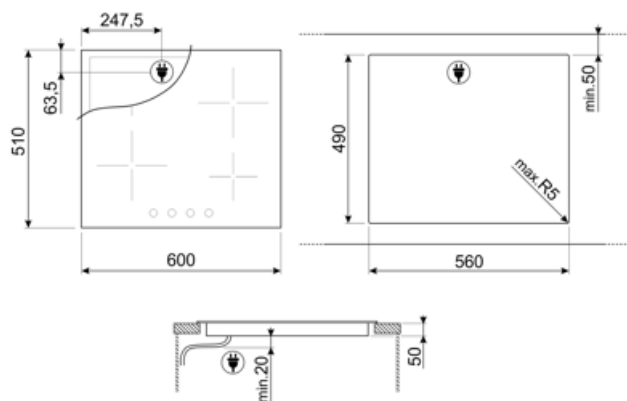

---

## Compatible Accessories

---








**SCRP**

Placas de indução e de cerâmica e raspador teppanyaki

---

## Symbols glossary

---

- |  |   |   |  |
|--|---|---|--|
|  | Perfil ultra baixo: Instalação de produto com borda plana - altura de 1 mm.   |  | Controle dos botões  |
|  | Protecção contra o sobreaquecimento: O sistema de segurança que desliga automaticamente a placa em caso de sobreaquecimento da unidade de controle.   |  | Vidro cerâmico: A base da placa é feita de cerâmica de vidro. O aquecimento é realizado pelos elementos de aquecimento Hi-Light. |
|  | Indicação de calor residual: Depois de a placa de cerâmica de vidro ter sido desligada, o indicador de calor residual mostra qual das zonas de aquecimento ainda permanece quente. Quando a temperatura cai abaixo de 60°C, o indicador se apaga. |   |  |