


SE364TDM



Product Family	Hob
Built-in type	Ultra-low profile or Fully Flushed
Dimensions	60 cm
Power supply	Electric
Type	Ceramic
EAN code	8017709240899

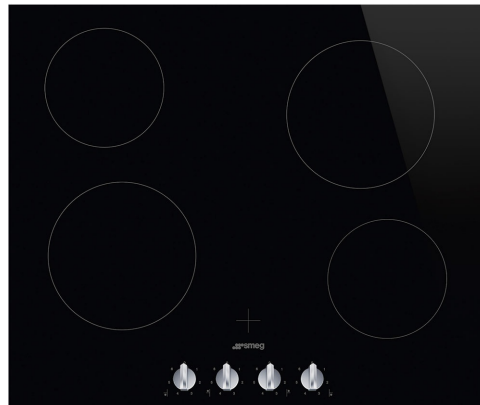

Aesthetics



Aesthetic	Selezione
Colour	Black
Acabamento	Glass
Material	Glass
Glass type	Ceramic
Glass edge	Straight edge
Frame	No
Type of control setting	Control knobs
Slider	No
Control knob position	Front
No. of controls	4
Controls colour	Silver
Illuminated control knobs	No
Control knob protection	No
Logo	Silk screen
Serigraphy colour	Grey
Alternative colours available	No

Program / Functions

No. of ceramic cook zones	4
Power levels	6
Total no. of cook zones	4

Options

Corte padrão

490x560 mm

Technical Features



Front-left - Ceramic - Single - 1.80 kW - Ø 18.4 cm
 Rear-left - Ceramic - Single - 1.20 kW - Ø 14.8 cm
 Rear-right - Ceramic - Single - 1.80 kW - Ø 18.4 cm
 Front-right - Ceramic - Single - 1.20 kW - Ø 14.8 cm

Automatic setting according to pan dimension No
 pan detection No
 Minimum pan diameter indication No
 Automatic switch off when overheat Yes

Automatic switch off when overflow No
 Residual heat indicator Yes
 Protection against accidental start up No


Accessories Included

Other accessories No

Electrical Connection

Electrical connection rating (W) 6000 W
 Current 18 A
 Voltage (V) 220-240 V
 Voltage 2 (V) 380-415 V
 Type of electric cable No
 Type of electric cable Double universal

Type of electric cable supplied Yes, Three and Single/Two-phase
 Frequency (Hz) 50/60 Hz
 Comprimento do cabo de alimentação 150 cm
 Placa de bornes 6 polos
 Ficha elétrica No
 Plug No

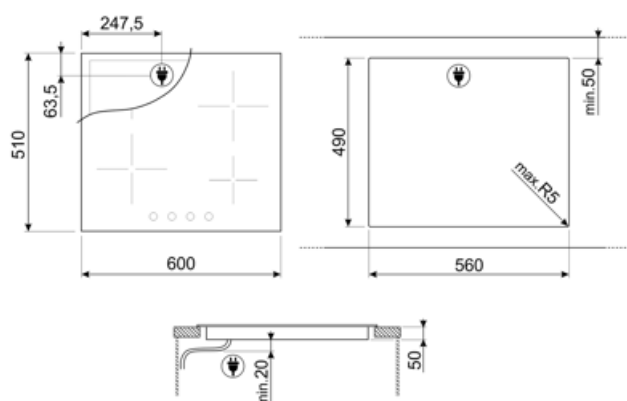

Compatible Accessories



SCRP

Placas de indução e de cerâmica e raspador teppanyaki

Symbols glossary



Controle dos botões



Protecção contra o sobreaquecimento: O sistema de segurança que desliga automaticamente a placa em caso de sobreaquecimento da unidade de controle.



Vidro cerâmico: A base da placa é feita de cerâmica de vidro. O aquecimento é realizado pelos elementos de aquecimento Hi-Light.



Indicação de calor residual: Depois de a placa de cerâmica de vidro ter sido desligada, o indicador de calor residual mostra qual das zonas de aquecimento ainda permanece quente. Quando a temperatura cai abaixo de 60°C, o indicador se apaga.