

# SE384EMTB





**Product Family** Hob

Ultra-low profile Built-in type

**Dimensions** 80 cm Power supply Electric Type Ceramic

8017709233747 EAN code



### **Aesthetics**



**Aesthetic** Universale Colour Black **Finishing** Glass Material Glass Glass type Ceramic Glass edge Angled edge Digi Touch Type of control setting Control knob position Front Serigraphy colour Grey

## **Program / Functions**



No. of ceramic cook zones 4 4 No. of cooking zones with booster Main on/off switch Yes Power levels 9 Total no. of cook zones 4

## **Options**













Worktop Cut-Out



490x745 mm

**Limited Power Consumption Mode**  Yes

26/7/2025

**SMEG SPA** 



Keep warm automatic Yes Limited Power 2800, 4000 W

function Consumption Mode in W

End cooking timer 4 Showroom Demo Option Yes
Minute minder 1 Control Lock / Child Yes

End of cooking alarm Yes Safety

Residual time indicator Yes Quick start Yes

#### **Technical Features**







Front-left - Ceramic - Double - 1.00 - 2.20 kW - Ø 14.8 - Ø 21.4 cm

Rear-left - Ceramic - Single - 1.20 kW - Ø 14.8 cm

Rear-right - Ceramic - Extendable - 1.40 - 2.20 kW - Ø 17.0 - 26.5x17.0 cm

Front-right - Ceramic - Single - 1.80 kW - Ø 18.4 cm

Automatic switch off

**h off** Yes

Yes

Automatic switch off

when overflow

when overheat

Residual heat indicator Yes

Yes. Double and Three

### **Electrical Connection**

Plug Not present Type of electric cable Yes, Single phase

Electrical connection 7400 W installed

rating (W) Additional connection

 Current
 22 A
 modalities
 Phase


 Voltage (V)
 220-240 V
 Frequency (Hz)
 50/60 Hz

Voltage 2 (V)

380-415 V

Power supply cable 150 cm length

Terminal box 6 poles

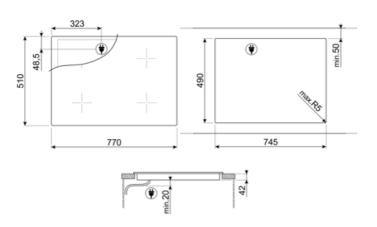



# **Compatible Accessories**



### SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs



### Symbols glossary



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Ultra-low profile: Installation of product with flat edge - height of 1 mm.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



Touch control



ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.



This function allows you to keep cooked food warm without burner it



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Time elapsed: shows how long the cooking zone has been in use.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



### Benefit (TT)

#### Ceramic hobs

Shorter cooking times and constant temperature control thanks to the ceramic cooktop, ensuring high performance

#### Glass

Brightness and elegance in the kitchen: the acid-etched glass gives the surface a refined, modern look that enhances the space.

#### Ceramic

Stability and design even up to 700°C: the cooktop material resists high temperatures without deforming, maintaining aesthetics and functionality even with intensive use.

Immediate access to functions via touch display, for simple and intuitive control

#### Control knob position frontal

Instant and intuitive control thanks to front controls, easily accessible for practical use.

#### **Keep Warm function**

Dishes always served at the right temperature, even after cooking, thanks to the Keep Warm function

Energy consumption optimization with Eco-Logic Advance, allowing absorption limitation from 2.4 kW in 0.1 kW steps

Nine power levels and Boost function for optimal cooking performance