

SE384EMTB



Product familie

Type

Afmeting

Voeding

Type

EAN-code

Kookplaat

Vlak opbouw

80 cm

Elektrisch

Keramisch

8017709233747



Design



Design

Kleur

Afwerking

Materiaal

Type glas

Glazen rand

Bediening

Positie bediening

Kleur serigrafie

Universeel

Zwart

Glas

Glas

Keramisch

Facetrand

Digi touch multi slider

Vooraan

Grijs

Programma's / Functies



Totaal aantal kookzones

4

Aantal keramische kookzones

4

Aantal kookzones met booster

4

Hoofdtoets aan/uit

Ja

Vermogenniveaus

9

Opties



Worktop Cut-Out

490x745 mm

ECO-Logic optie

Ja

| | | | |
|-------------------------------|----|---------------------------|--------------|
| Warmhoudfunctie | Ja | Beperkt vermogensverbruik | 2800, 4000 W |
| Automatische uitschakeling | 4 | Showroom demo optie | Ja |
| Timer | 1 | Kinderbeveiliging | Ja |
| Geluidssignaal einde kooktijd | Ja | Quick start | Ja |
| Resttijd indicator | Ja | | |

Technische specificaties



Linksvoor - Keramisch - dubbel - 1.00 - 2.20 kW - Ø 14.8 - Ø 21.4 cm

Linksachter - Keramisch - enkel - 1.20 kW - Ø 14.8 cm


Rechtsachter - Keramisch - uitbreidbaar - 1.40 - 2.20 kW - Ø 17.0 - 26.5x17.0 cm

Rechtsvoor - Keramisch - enkel - 1.80 kW - Ø 18.4 cm

| | | | |
|--|----|----------------------|----|
| Automatisch uitschakelen i.g.v. oververhitting | Ja | Restwarmte indicator | Ja |
| Automatisch uitschakelen i.g.v. overkoken | Ja | | |

Elektrische aansluiting

| | | | |
|-------------------------|-----------|----------------------|-----------------------------|
| Nominale aansluitwaarde | 7400 W | Type stroomkabel | Yes, Double and Three Phase |
| Stroom | 22 A | Frequentie | 50/60 Hz |
| Spanning (V) | 220-240 V | Lengte voedingskabel | 150 cm |
| Spanning 2 (V) | 380-415 V | Aansluiting | 6 polig |
| Type stroomkabel | Eenfasig | | |

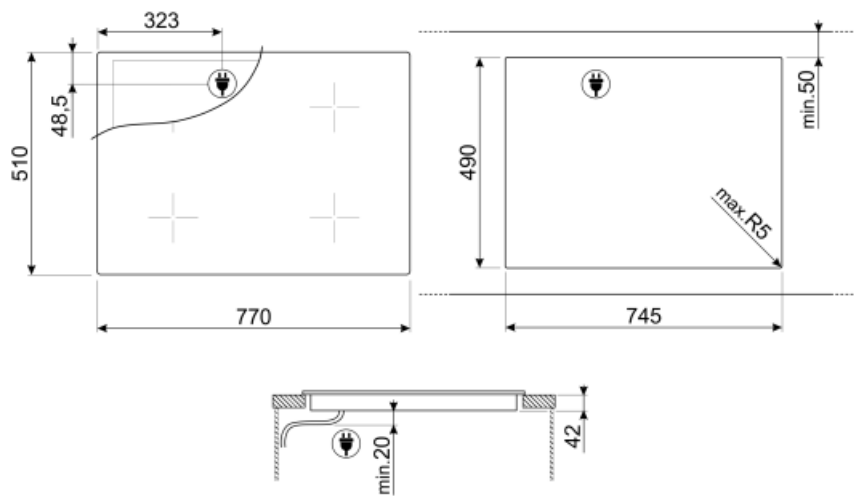














Not included accessories



SCRP

Schraper voor inductie- en vitrokeramische kookplaten

Symbols glossary (TT)

| | | | |
|--|--|---|---|
|  | Power booster: option allows the zone to work at full power when very intense cooking is necessary. |  | Ultra-low profile: Installation of product with flat edge - height of 1 mm. |
|  | Sommige modellen zijn voorzien van een functie om het programma/de cyclus te blokkeren zodat het niet per ongeluk kan aangepast worden. |  | ECO-logic: option allows you to restrict the power limit of the appliance real energy saving. |
|  | This function allows you to keep cooked food warm without burner it |  | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit. |
|  | Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light. |  | Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids. |
|  | Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached. |  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |
|  | Time elapsed: shows how long the cooking zone has been in use. |  | Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time. |
|  | Touch control | | |