

SE384EMTD



Product Family	Hob
Built-in	Ultra-low profile or Fully Flushed
Dimensions	80 cm
Power supply	Electric
Type	Ceramic
EAN code	8017709240905



Aesthetics



Aesthetics	Universal
Colour	Black
Finishing	Glass
Material	Glass
Glass Type	Ceramic
Glass edge	Straight edge
Type of control setting	Touch control
Control knobs position	Front
Serigraphy colour	Grey

Program / Functions



No. of ceramic cook zones	4
No. of cooking zones with booster	4
Main on/off switch	Yes
Power levels	9
Total no. of cook zones	4

Options



Standard cut out	490x745 mm	Limited Power Consumption Mode	Yes
------------------	------------	--------------------------------	-----

Keep warm automatic function	Yes	Limited Power Consumption Mode in W	2800, 4000 W
End cooking timer	4	Show Room Demo Option	Yes
Minute minder	1	Control Lock / Child Safety	Yes
End of cooking acoustic alarm	Yes	Quick start	Yes

Technical Features



Front left - Ceramic - double - 1.00 - 2.20 kW - Ø 14.8 - Ø 21.4 cm

Rear left - Ceramic - single - 1.20 kW - Ø 14.8 cm

Rear right - Ceramic - extendable - 1.40 - 2.20 kW - Ø 17.0 - 26.5x17.0 cm

Front right - Ceramic - single - 1.80 kW - Ø 18.4 cm

Automatic switch off when overheat

Yes

Residual heat indicator

Yes


Automatic switch off when overflow

Yes

Electrical Connection

Nominal power (W)	7400 W
Current	22 A
Voltage (V)	220-240 V
Voltage 2 (V)	380-415 V
Type of electric cable	Single phase

Type of electric cable	Yes, Double and Three Phase
Frequency (Hz)	50/60 Hz
Power supply cable length	150 cm
Terminal Box	6 poles

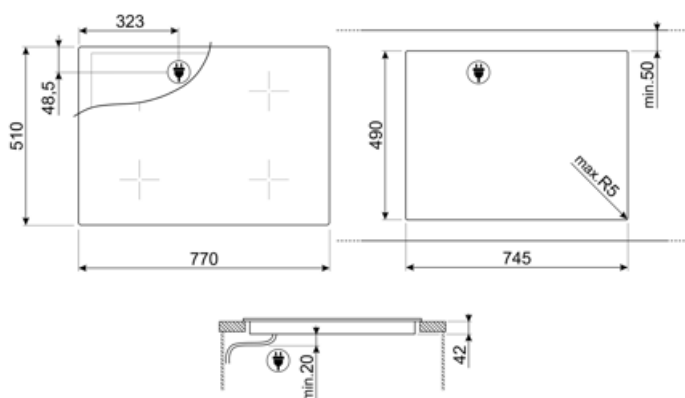













Compatible Accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper

Symbols glossary

	Power booster: option allows the zone to work at full power when very intense cooking is necessary.		Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.
	ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.		Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.
	Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.		Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.
	Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.		Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.
	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.		Time elapsed: shows how long the cooking zone has been in use.
	Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.		Touch control

Benefit

Ceramic hobs

Shorter cooking times and constant temperature control thanks to the ceramic cooktop, ensuring high performance

Glass

Brightness and elegance in the kitchen: the acid-etched glass gives the surface a refined, modern look that enhances the space.

Ceramic

Stability and design even up to 700°C: the cooktop material resists high temperatures without deforming, maintaining aesthetics and functionality even with intensive use.

Immediate access to functions via touch display, for simple and intuitive control

Control knob position frontal

Instant and intuitive control thanks to front controls, easily accessible for practical use.

Keep Warm function

With the Keep Warm function, your food stays perfectly heated, ready to serve whenever you are

Energy consumption optimizsation with Eco-Logic Advance, allowing absorption limitation from 2.4 kW in 0.1 kW steps, reducing waste and lowering your electricity usage

Nine power levels and Boost function for optimal cooking performance