

SE385EMTB



Product Family	Hob
Built-in type	Ultra-low profile
Dimensions	80 cm
Power supply	Electric
Type	Ceramic
EAN code	8017709234751



Aesthetics



Aesthetic	Universale
Colour	Black
Finishing	Glass
Material	Glass
Glass type	Ceramic
Glass edge	Angled edge
Type of control setting	Digi Touch
Control knob position	Front
Serigraphy colour	Grey

Program / Functions



No. of ceramic cook zones	5
No. of cooking zones with booster	5
Power levels	9
Total no. of cook zones	5

Options



Worktop Cut-Out	490x745 mm	Limited Power Consumption Mode	Yes
Keep warm automatic function	Yes		

End cooking timer	5	Limited Power	2800, 4000 W
Minute minder	1	Consumption Mode in W	
End of cooking alarm	Yes	Showroom Demo Option	Yes
Residual time indicator	Yes	Control Lock / Child Safety	Yes
		Quick start	Yes

Technical Features



Front-left - Ceramic - Single - Ø 18.4 cm

Rear-left - Ceramic - Single - Ø 14.8 cm

Central - Ceramic - Extendable - 1.40 - 2.20 kW - Ø 17.0 - 26.5x17.0 cm

Front-right - Ceramic - Double - 1.00 - 2.20 kW - Ø 14.8 - Ø 21.4 cm

Front-right - 1.20 kW - Ø 14.8 cm

Automatic switch off when overheat Yes |


Residual heat indicator Yes |

Automatic switch off when overflow Yes |

Electrical Connection

Plug	Not present
Electrical connection rating (W)	8600 W
Current	24 A
Voltage (V)	220-240 V
Voltage 2 (V)	380-415 V

Type of electric cable installed	Yes, Single phase
Additional connection modalities	Yes, Double and Three Phase
Frequency (Hz)	50/60 Hz
Power supply cable length	150 cm
Terminal box	6 poles

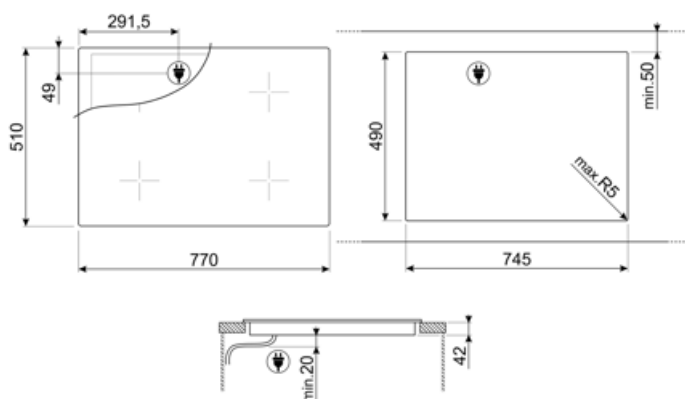














Compatible Accessories



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

Symbols glossary

	Power booster: option allows the zone to work at full power when very intense cooking is necessary.		Ultra-low profile: Installation of product with flat edge - height of 1 mm.
	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.		ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.
	This function allows you to keep cooked food warm without burner it		Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.
	Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.		Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.
	Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.		Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.
	Time elapsed: shows how long the cooking zone has been in use.		Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.
	Touch control		

Benefit (TT)

Ceramic hobs

Shorter cooking times and constant temperature control thanks to the ceramic cooktop, ensuring high performance

Glass

Brightness and elegance in the kitchen: the acid-etched glass gives the surface a refined, modern look that enhances the space

Ceramic

Stability and design even up to 700 °C: the cooktop material resists high temperatures without deforming, maintaining aesthetics and functionality even with intensive use

Immediate access to functions via touch display, for simple and intuitive control

Control knob position frontal

Instant and intuitive control thanks to front controls, easily accessible for practical use

Keep Warm function

Dishes always served at the right temperature, even after cooking, thanks to the Keep Warm function

Energy consumption optimization with Eco-Logic Advance, allowing absorption limitation from 2.4 kW in 0.1 kW steps

Nine power levels and Boost function for optimal cooking performance