

SE394EMTBAU



| | |
|----------------|-------------------|
| Product Family | Hob |
| Built-in type | Ultra-low profile |
| Dimensions | 90 cm |
| Power supply | Electric |
| Type | Ceramic |
| EAN code | 8017709265762 |



Aesthetics



| | |
|-------------------------|----------------|
| Aesthetic | Universale |
| Colour | Black |
| Finishing | Glass |
| Material | Glass |
| Glass type | Ceramic |
| Glass edge | Angled edge |
| Type of control setting | Touch controls |
| Control knob position | Front |
| Serigraphy colour | Grey |

Programs / Functions



| | |
|-----------------------------------|-----|
| Total no. of cook zones | 4 |
| No. of ceramic cook zones | 4 |
| No. of cooking zones with booster | 4 |
| Main on/off switch | Yes |
| Power levels | 9 |

Options



| | | | |
|------------------|------------|-------------------------|-----|
| Standard cut out | 490x850 mm | Residual time indicator | Yes |
|------------------|------------|-------------------------|-----|

| | | | |
|------------------------------|-----|-------------------------------------|--------------|
| Keep warm automatic function | Yes | Limited Power Consumption Mode | Yes |
| End cooking timer | 4 | Limited Power Consumption Mode in W | 2800, 4000 W |
| Minute minder | 1 | Showroom Demo Option | Yes |
| End of cooking alarm | Yes | Control Lock / Child Safety | Yes |

Technical Features



Front-left - Ceramic - Double - 1.00 - 2.20 kW - Ø 14.8 - Ø 21.4 cm

Rear-left - Ceramic - Single - 1.20 kW - Ø 14.8 cm

Rear-right - Ceramic - Extendable - 1.40 - 2.20 kW - Ø 17.0 - 26.5x17.0 cm

Front-right - Ceramic - Single - 1.80 kW - Ø 18.4 cm

Automatic switch off when overheat

Yes

Residual heat indicator


Yes

Automatic switch off when overflow

Yes

Electrical Connection

| | | | |
|----------------------------------|--------------|---------------------------|-----------------------------|
| Electrical connection rating (W) | 7400 W | Type of electric cable | Yes, Double and Three Phase |
| Current | 33 A | Frequency (Hz) | 50/60 Hz |
| Voltage (V) | 220-240 V | Power supply cable length | 150 cm |
| Voltage 2 (V) | 380-415 V | Terminal box | 6 poles |
| Type of electric cable | Single phase | | |

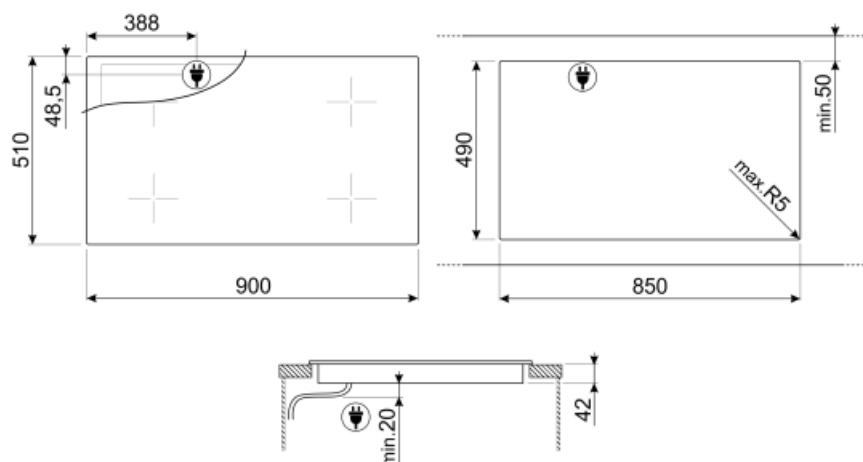













Not included accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper

Symbols glossary (TT)

| | | | |
|--|---|---|---|
|  | Power booster: option allows the zone to work at full power when very intense cooking is necessary. |  | Ultra-low profile: Installation of product with flat edge - height of 1 mm. |
|  | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed. |  | Touch control |
|  | ECO-logic: option allows you to restrict the power limit of the appliance real energy saving. |  | Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically. |
|  | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit. |  | Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light. |
|  | Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids. |  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |
|  | Time elapsed: shows how long the cooking zone has been in use. |  | Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time. |