

SE464TD



Product Family

| | |
|---------------|------------------------------------|
| Built-in type | Ultra-low profile or Fully Flushed |
| Dimensions | 60 cm |
| Power supply | Electric |
| Type | Ceramic |
| EAN code | 8017709324209 |



Aesthetics



| | |
|-------------------------|----------------|
| Aesthetic | Universale |
| Colour | Black |
| Finishing | Glass |
| Material | Glass |
| Glass type | Ceramic |
| Glass edge | Straight edge |
| Type of control setting | Compact Slider |
| Slider | Yes |
| LED colours | Red |
| Control knob position | Front |
| Logo | Silk screen |
| Serigraphy colour | Grey |

Program / Functions



| | |
|-----------------------------------|-----|
| No. of ceramic cook zones | 4 |
| No. of cooking zones with booster | 4 |
| Main on/off switch | Yes |
| Power levels | 9 |
| Total no. of cook zones | 4 |

Options



| | | | |
|---|------------|------------------------------------|---------------------------|
| Worktop Cut-Out | 490x560 mm | Residual time indicator | Yes |
| Keep warm automatic function | Yes | Limited Power | Yes |
| Melting/Low temperature cooking function | Yes | Consumption Mode | |
| End cooking timer | 4 | Limited Power | 2500 to 6000 - step 100 W |
| Pause option | Yes | Consumption Mode in W | |
| Minute minder | 1 | Showroom Demo Option | Yes |
| End of cooking alarm | Yes | Control Lock / Child Safety | Yes |
| | | Quick start | Yes |

Technical Features




Front-left - Ceramic - Single - 1.80 kW - Ø 18.5 cm
 Rear-left - Ceramic - Single - 1.20 kW - Ø 15.0 cm
 Rear-right - Ceramic - Single - 1.80 kW - Ø 18.5 cm
 Front-right - Ceramic - Single - 1.20 kW - Ø 15.0 cm

| | | | |
|---|-----|--------------------------------|-----|
| Automatic switch off when overheated | Yes | Residual heat indicator | Yes |
| Automatic switch off when overflow | Yes | | |

Electrical Connection

| | | | |
|---|-------------------|---|-----------------------------|
| Electrical connection rating (W) | 6000 W | Additional connection modalities | Yes, Double and Three Phase |
| Current | 18 A | Frequency (Hz) | 50/60 Hz |
| Voltage (V) | 220-240 V | Power supply cable length | 150 cm |
| Voltage 2 (V) | 380-415 V | Terminal box | 6 poles |
| Type of electric cable installed | Yes, Single phase | Plug | Not present |

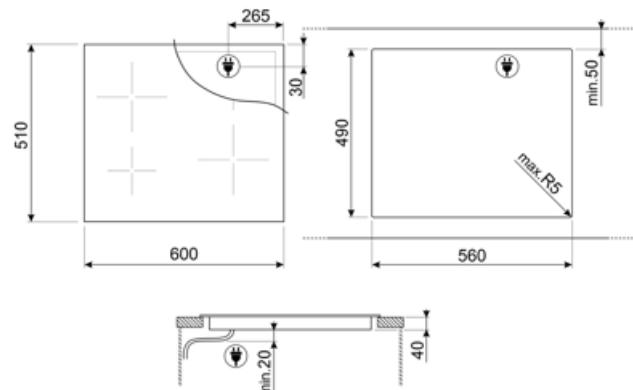

Compatible Accessories



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

Symbols glossary

| | | | |
|--|---|---|--|
|  | Power booster: option allows the zone to work at full power when very intense cooking is necessary. |  | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed. |
|  | Compact Slider intuitive and easy to use |  | The slider control panel allows you to adjust the power simply by passing your finger across the touch device. |
|  | ECO-logic: option allows you to restrict the power limit of the appliance real energy saving. |  | This function allows you to keep cooked food warm without burner it |
|  | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit. |  | Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light. |
|  | Melting function, suitable for slowly melting delicate foods such as chocolate or butter. |  | Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids. |
|  | All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated. |  | Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached. |
|  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |  | Time elapsed: shows how long the cooking zone has been in use. |
|  | Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time. | | |