

# SEI5632D



<b>Product Family</b>	Hob
<b>Built-in type</b>	Ultra-low profile or Fully Flushed
<b>Dimensions</b>	60 cm
<b>Power supply</b>	Electric
<b>Type</b>	Induction
<b>EAN code</b>	8017709262983



## Aesthetics



<b>Aesthetic</b>	Universal
<b>Colour</b>	Black
<b>Acabamento</b>	Glass
<b>Material</b>	Glass
<b>Glass type</b>	Ceramic
<b>Glass edge</b>	Straight edge
<b>Type of control setting</b>	Touch controls
<b>Comandos Slider</b>	Vermelho
<b>Control knob position</b>	Front
<b>Serigraphy colour</b>	Grey

## Program / Functions



<b>No. of induction cook zones</b>	3
<b>No. of cooking zones with booster</b>	3
<b>Main on/off switch</b>	Yes
<b>Power levels</b>	14
<b>Total no. of cook zones</b>	3

## Options



<b>Multizone Option</b>	No	<b>Residual time indicator</b>	Yes
-------------------------	----	--------------------------------	-----

<b>Corte padrão</b>	490x560 mm	<b>Limited Power Consumption Mode</b>	Yes
<b>End cooking timer</b>	3	<b>Limited Power Consumption Mode in W</b>	1500, 2000, 2500, 3000, 3500, 4000, 4500, 5000, 6000, 7200 W
<b>Pause option</b>	Yes	<b>Showroom Demo Option</b>	Yes
<b>Minute minder</b>	3	<b>Control Lock / Child Safety</b>	Yes
<b>End of cooking alarm</b>	Yes	<b>Flexi-Heat</b>	No

## Technical Features



Front-left - Induction - Single - 2.30 kW - Booster 3.70 kW - Ø 21 cm


Rear-left - Induction - Single - 1.40 kW - Booster 2.50 kW - Ø 14.5 cm

Front-right - Induction - Giant - 1.80 - 2.80 kW - Booster 3.50 - 3.60 kW - Ø 18/28 cm

<b>Automatic setting according to pan dimension</b>	Yes	<b>Automatic switch off when overflow</b>	Yes
<b>pan detection</b>	Yes	<b>Residual heat indicator</b>	Yes
<b>Minimum pan diameter indication</b>	Yes	<b>Sensor de calor perfeito</b>	No
<b>Automatic switch off when overheat</b>	Yes		

## Electrical Connection

<b>Plug</b>	No	<b>Frequency (Hz)</b>	50/60 Hz
<b>Electrical connection rating (W)</b>	7200 W	<b>Comprimento do cabo de alimentação</b>	150 cm
<b>Current</b>	32 A	<b>Placa de bornes</b>	5 polos
<b>Voltage (V)</b>	220-240 V	<b>Ficha elétrica</b>	No
<b>Type of electric cable</b>	Single phase		

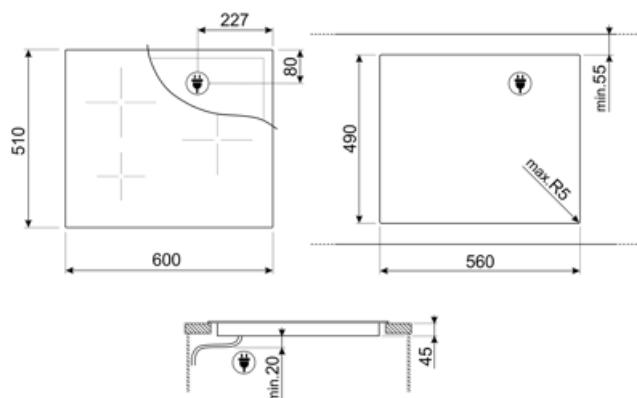

---

## Compatible Accessories

---



### SCRP













Placas de indução e de cerâmica e raspador teppanyaki



### TPK

Placa grelhadora de aço inoxidável para cozinhar pratos Teppanyaki

## Symbols glossary

	Impulsionador de potência: opção permite que a zona funcione em potência máxima quando é necessário cozinhar muito intensamente.		Bloqueio para crianças: alguns modelos estão equipados com um dispositivo para bloquear o programa/ciclo para que não possa ser acidentalmente alterado.
	Touch Control		ECO-logic: opção permite-lhe restringir o limite de potência da poupança de energia real do aparelho.
	Zona gigante: A zona gigante oferece espaço extra e flexibilidade.		Protecção contra o sobreaquecimento: O sistema de segurança que desliga automaticamente a placa em caso de sobreaquecimento da unidade de controle.
	Indução: O trabalho destas placas baseia-se no princípio da indução electromagnética. O calor é gerado diretamente na parte inferior da panela durante o seu contato com a placa.		Protecção especial contra transbordamento: A protecção especial contra transbordamento desliga o fogão na presença de transbordamento de líquidos.
	PAUSE_72dpi		Indicação de calor residual: Depois de a placa de cerâmica de vidro ter sido desligada, o indicador de calor residual mostra qual das zonas de aquecimento ainda permanece quente. Quando a temperatura cai abaixo de 60°C, o indicador se apaga.
	Tempo decorrido: mostra há quanto tempo a zona de cozedura está em uso.		Temporizador: Todas as placas de cerâmica têm um temporizador que termina automaticamente o cozimento após um tempo predefinido.