

SER60SGH3



Product Family	Hob
Built-in type	Traditional
Dimensions	60 cm
Power supply	Gas
Type	Gas
EAN code	8017709105235



Aesthetics



Aesthetic	Classica
Colour	Stainless steel
Acabamento	Satin
Material	Stainless Steel
Type of steel	Brushed
Pan stands	Cast iron
Pan Stand Coating	No
Burner Coating	No
Type of control setting	Control knobs
Control knob position	Front
No. of controls	4
Controls colour	Steel effect
Illuminated control knobs	No
Control knob protection	No
Serigraphy colour	Grey

Program / Functions

No. of gas cook zones	4
Total no. of cook zones	4

Options



Corte padrão	478-482x555-560 mm
--------------	--------------------

Technical Features

UR

Left - Gas - UR - 3.90 kW

Rear-centre - Gas - Semi Rapid - 1.70 kW

Front-centre - Gas - AUX - 1.10 kW

Right - Gas - Rapid - 2.60 kW


Gas safety valves Yes Automatic Ignition Yes

Electrical Connection

Plug	No	Frequency (Hz)	50/60 Hz
Electrical connection rating (W)	1 W	Comprimento do cabo de alimentação	120 cm
Voltage (V)	220-240 V	Ficha elétrica	No

Gas Connection

Gas Type	G20 Natural gas	Other gas connections provided	Conical
Ligação ao gás	Ligação ao gás cilíndrica	Gas connection rating (W)	9300 W
Other gas nozzles included	G30 GPL Liquid gas		

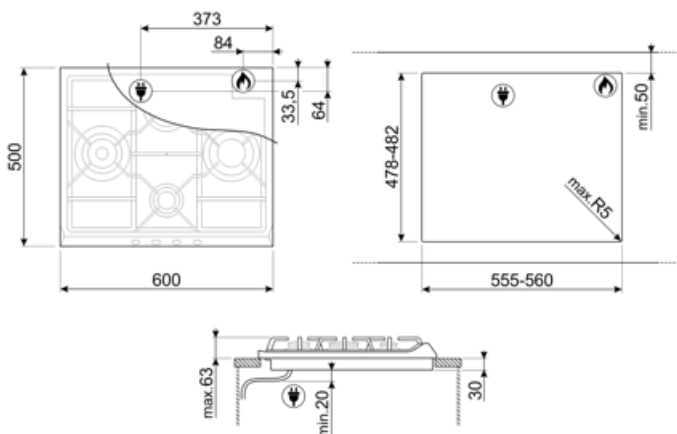

Compatible Accessories

6MP700AO

Conjunto de botões para placa - Cortina Antracito/Latão antigo



6MP700BS

Conjunto de botões para placa - Prata Cortina/Prata



6MP800P



BB3679

Grelha de ferro fundido



CC60X

Tampa de vidro com estrutura de aço inoxidável adequada para placas de 60 cm com controles frontais.

6MP700AX

Conjunto de botões para placa - Cortina Antracito/Prata



6MP700PO

Conjunto de botões para placa - Creme Cortina/Latão velho



6MPF2465X

Conjunto de botões para placa - Seleção



CC60NE

Tampa preta adequada para placas de 60 cm com controles frontais.








TPK

Placa grelhadora de aço inoxidável para cozinhar pratos Teppanyaki



Symbols glossary

- | | | | |
|--|--|---|---|
|  | Instalação padrão: Instalação tradicional em tampo de mesa, adequado para qualquer conjunto de cozinha |  | Suportes de ferro fundido para serviço pesado: para máxima estabilidade e resistência. |
|  | CUT_OUT_STANDARD_72dpi |  | Queimadores ultrarrápidos: Queimadores ultrarrápidos potentes oferecem até 5kw de potência. |
|  | Controle dos botões | | |