

## SEU122B



**Product family**

Cooktop

**Installation**

Ultra-low profile

**Dimensions**

12"

**Power supply**


Electric

**Type**

Ceramic

**EAN code**

8017709240929

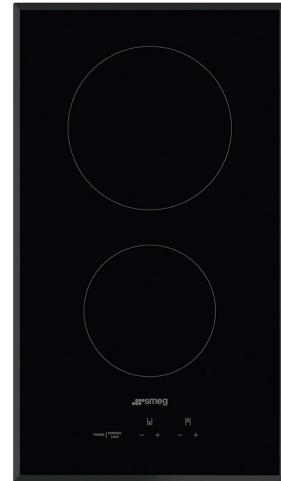

## Aesthetic



**Aesthetics**

Universal

**Color**

Black

**Finishing**

Glass

**Material**

Glass

**Glass**

Ceramic

**Glass edge**

Beveled

**Control setting type**

Touch controls

**Controls position**

Front

**Logo**

Silkscreened

**Silkscreen color**

Gray

## Program / Functions



**No. of ceramic cook zones**

2

**Cooking zones with Booster**

2

**Power levels**

9

**Cooking zones**

2

## Technical Features



Front-center - Ceramic - single - 1.00 kW - Ø 14.8 cm

Rear-center - Ceramic - single - 1.40 kW - Ø 18.4 cm


Automatic switch-off in Yes  
case of over-heating

Residual heat indicator Yes

Automatic switch-off in Yes  
case of overflow

## Electrical Connection

Nominal power	2400 W	Frequency	60 Hz
Current	22 A	Power cord length	47 1/4 "
Voltage	120 V	Terminal box	3 poles
Electric cable type	Single phase	Plug	No
Type of electric cable supplied	Yes, Single phase		

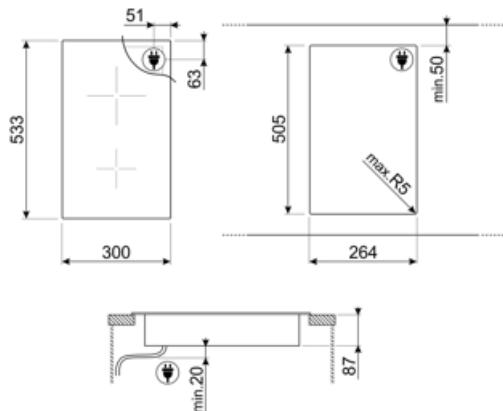

---

## Compatible Accessories

---



**SCRP**

Induction and ceramic hobs and teppanyaki scraper

## Symbols glossary



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



Touch control



Ultra-low profile: Installation of product with flat edge - height of 1 mm.



Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.