SEU122B



Product family	Cooktop
Installation	Ultra-low profile
Dimensions	12"
Power supply	Electric
Type	Ceramic
EAN code	8017709240929

Aesthetic

Aesthetics	Universal
Color	Black
Finishing	Glass
Material	Glass
Glass	Ceramic
Glass edge	Beveled
Control setting type	Touch controls
Controls position	Front
Logo	Silkscreened
Silkscreen color	Gray

Program / Functions

No. of ceramic cook zones	2
Cooking zones with Booster	2
Power levels	9
Cooking zones	2


Technical Features

Front-center - Ceramic - single - 1.00 kW - Ø 14.8 cm
Rear-center - Ceramic - single - 1.40 kW - Ø 18.4 cm

Automatic switch-off in case of over-heating	Yes	**Residual heat indicator**	Yes
Automatic switch-off in case of overflow	Yes		

Electrical Connection

Nominal power	2400 W	**Frequency**	60 Hz
Current	22 A	**Power cord length**	47 1/4 "
Voltage	120 V	**Terminal box**	3 poles
Electric cable type	Single phase	**Plug**	No
Type of electric cable supplied	Yes, Single phase		

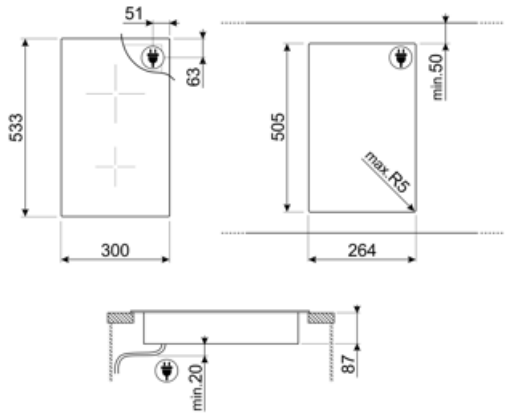

Compatible Accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper

Symbols glossary



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



Touch control



Ultra-low profile: Installation of product with flat edge - height of 1 mm.



Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.