

SEU244ETB



Product Family
Built-in type
Dimensions
Power supply
Type
EAN code

Hob
Ultra-low profile
24"
Electric
Ceramic
8017709240998



Aesthetics



Aesthetic	Universale
Colour	Black
Finishing	Glass
Material	Glass
Glass type	Ceramic
Glass edge	Angled edge
Type of control setting	Digi Touch
Control knob position	Front
Serigraphy colour	Grey

Programs / Functions



Total no. of cook zones	4
No. of cooking zones with booster	4
Power levels	9

Options



End cooking timer	1	Limited Power	4000 W
End of cooking alarm	Yes	Consumption Mode in W	
Limited Power	Yes	Showroom Demo Option	Yes
Consumption Mode			

Control Lock / Child Safety Yes

Technical Features




Front-left - Ceramic - Single - 1.20 kW - Ø 14.8 cm
 Rear-left - Ceramic - Single - 1.80 kW - Ø 18.4 cm
 Rear-right - Ceramic - Double - 0.75 - 1.80 kW - Ø 12.4 - Ø 18.4 cm
 Front-right - Ceramic - Single - 1.20 kW - Ø 14.8 cm

Automatic switch off when overheat Yes Residual heat indicator Yes
 Automatic switch off when overflow Yes

Electrical Connection

Electrical connection rating (W)	6000 W	Type of electric cable	Single phase
Current	18 A	Frequency (Hz)	60 Hz
Voltage (V)	240 V	Power supply cable length	47 1/4 "
Voltage 2 (V)	208 V	Terminal box	6 poles

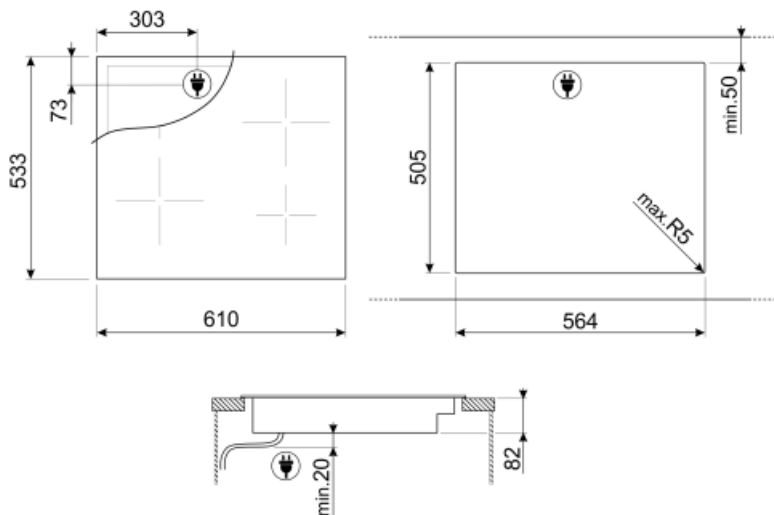











Not included accessories



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

Symbols glossary (TT)

	Power booster: option allows the zone to work at full power when very intense cooking is necessary.		Ultra-low profile: Installation of product with flat edge - height of 1 mm.
	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.		ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.
	Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.		Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.
	Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.		Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.
	Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.		Touch control