


SEU304EMTB



Product family	Cooktop
Installation	Ultra-low profile
Dimensions	30"
Power supply	Electric
Type	Ceramic
EAN code	8017709240981

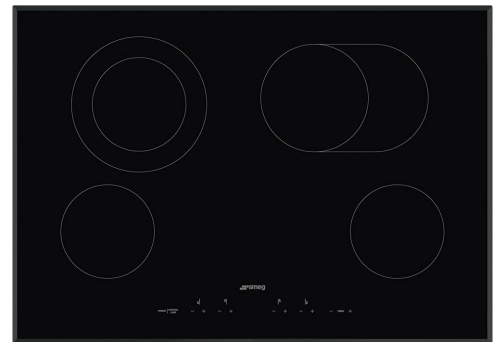

Aesthetic



Color	Black
Finishing	Glass
Material	Glass
Glass	Ceramic
Glass edge	Beveled
Control setting type	Touch controls
Controls position	Front
Silkscreen color	Gray

Program / Functions



No. of ceramic cook zones	4
Cooking zones with Booster	4
Power levels	9
Cooking zones	4

Options



End cooking timer	1	Showroom mode	Yes
End-of-cooking acoustic alarm	Yes	Child safety lock	Yes
		Quick start	Yes

Limited power consumption option	Yes
Limited Power Consumption Mode in W	4000 W

Technical Features



Front-left - Ceramic - single - 1.20 kW - Ø 14.8 cm

Rear-left - Ceramic - double - 1.00 - 1.00 kW - Ø 14.8 - Ø 21.4 cm

Rear-right - Ceramic - Flexible - 1.60 - 2.40 kW - Ø 17.0 - 26.5x17.0 cm

Front-right - Ceramic - single - 1.20 kW - Ø 14.8 cm


Automatic switch-off in case of over-heating

Residual heat indicator Yes

Automatic switch-off in case of overflow

Electrical Connection

Nominal power	6800 W	Electric cable type	Single phase
Current	20 A	Frequency	60 Hz
Voltage	240 V	Power cord length	47 1/4 "
Voltage 2 (V)	208 V	Terminal box	6 poles

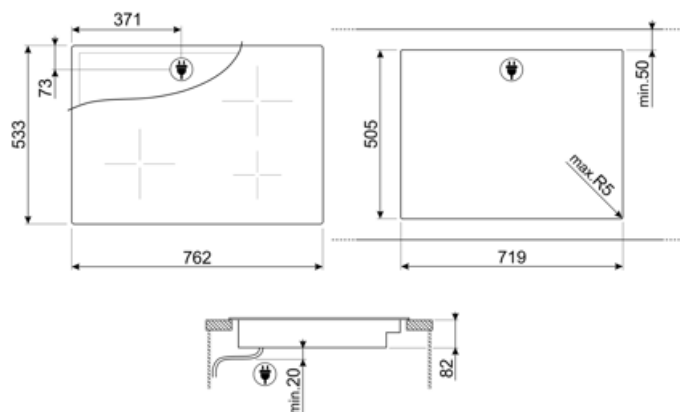












Compatible Accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper

Symbols glossary

	Power booster: option allows the zone to work at full power when very intense cooking is necessary.		Ultra-low profile: Installation of product with flat edge - height of 1 mm.
	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.		ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.
	Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.		Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.
	Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.		Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.
	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.		Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.
	Touch control		

Benefit (TT)

Ceramic hobs

Shorter cooking times and constant temperature control thanks to the ceramic cooktop, ensuring high performance

Immediate access to functions via touch display, for simple and intuitive control

Energy consumption optimization with Eco-Logic Advance, allowing absorption limitation from 2.4 kW in 0.1 kW steps

Nine power levels and Boost function for optimal cooking performance