


SEU365ETB



Product Family	Hob
Built-in type	Ultra-low profile
Dimensions	36"
Power supply	Electric
Type	Ceramic
EAN code	8017709241001

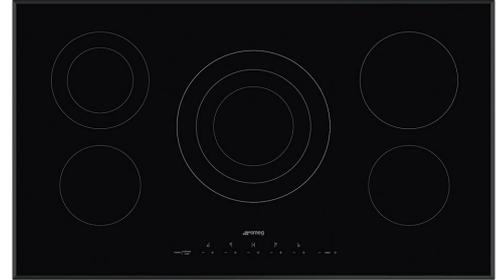

Aesthetics



Colour	Black
Finishing	Glass
Material	Glass
Glass type	Ceramic
Glass edge	Angled edge
Type of control setting	Digi Touch
Control knob position	Front
Logo	Silk screen
Serigraphy colour	Grey

Program / Functions



No. of ceramic cook zones	5
No. of cooking zones with booster	5
Power levels	9
Total no. of cook zones	5

Options



End cooking timer	1	Limited Power	4000 W
End of cooking alarm	Yes	Consumption Mode in W	
Residual time indicator	Yes	Showroom Demo Option	Yes

Limited Power Consumption Mode	Yes	Control Lock / Child Safety	Yes
		Quick start	Yes

Technical Features




Front-left - Ceramic - Single - 1.20 kW - Ø 14.8 cm
 Rear-left - Ceramic - Double - 0.75 - 1.80 kW - Ø 12.4 - Ø 18.4 cm
 Central - Ceramic - Triple - 1.05 - 1.95 - 2.70 kW - Ø 15.0 - Ø 21.6 - Ø 28.8 cm
 Rear-right - Ceramic - Single - 1.80 kW - Ø 18.4 cm
 Front-right - Ceramic - Single - 1.20 kW - Ø 14.8 cm

Automatic switch off when overheat	Yes	Residual heat indicator	Yes
Automatic switch off when overflow	Yes		

Electrical Connection

Electrical connection rating (W)	8700 W	Frequency (Hz)	60 Hz
Current	25 A	Power supply cable length	47 1/4 "
Voltage (V)	240 V	Terminal box	6 poles
Voltage 2 (V)	208 V	Plug	No
Type of electric cable	Single phase		

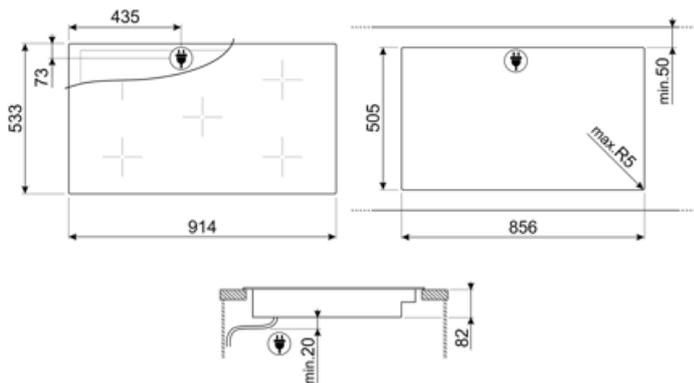

Compatible Accessories



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

Symbols glossary

	Power booster: option allows the zone to work at full power when very intense cooking is necessary.		Ultra-low profile: Installation of product with flat edge - height of 1 mm.
	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.		Touch control
	ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.		Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.
	Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.		Overfill protection: The special overflow protection shuts down the stove in the presence of overflow of liquids.
	Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.		Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.
	Time elapsed: shows how long the cooking zone has been in use.		Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.