

# SEU365ETB



Product family	Cooktop
Installation	Ultra-low profile
Dimensions	36"
Power supply	Electric
Type	Ceramic
EAN code	8017709241001



## Aesthetic



Color	Black
Finishing	Glass
Material	Glass
Glass	Ceramic
Glass edge	Beveled
Control setting type	Touch controls
Controls position	Front
Logo	Silkscreened
Silkscreen color	Gray

## Program / Functions



No. of ceramic cook zones	5
Cooking zones with Booster	5
Power levels	9
Cooking zones	5

## Options



End cooking timer	1	Limited Power	4000 W
End-of-cooking acoustic alarm	Yes	Consumption Mode in W	
		Showroom mode	Yes

<b>Residual time indicator</b>	Yes	<b>Child safety lock</b>	Yes
<b>Limited power consumption option</b>	Yes	<b>Quick start</b>	Yes

## Technical Features




Front-left - Ceramic - single - 1.20 kW - Ø 14.8 cm  
 Rear-left - Ceramic - double - 0.75 - 1.80 kW - Ø 12.4 - Ø 18.4 cm  
 Center - Ceramic - Triple - 1.05 - 1.95 - 2.70 kW - Ø 15.0 - Ø 21.6 - Ø 28.8 cm  
 Rear-right - Ceramic - single - 1.80 kW - Ø 18.4 cm  
 Front-right - Ceramic - single - 1.20 kW - Ø 14.8 cm

<b>Automatic switch-off in case of over-heating</b>	Yes	<b>Residual heat indicator</b>	Yes
<b>Automatic switch-off in case of overflow</b>	Yes		

## Electrical Connection

<b>Nominal power</b>	8700 W	<b>Frequency</b>	60 Hz
<b>Current</b>	25 A	<b>Power cord length</b>	47 1/4 "
<b>Voltage</b>	240 V	<b>Terminal box</b>	6 poles
<b>Voltage 2 (V)</b>	208 V	<b>Plug</b>	No
<b>Electric cable type</b>	Single phase		

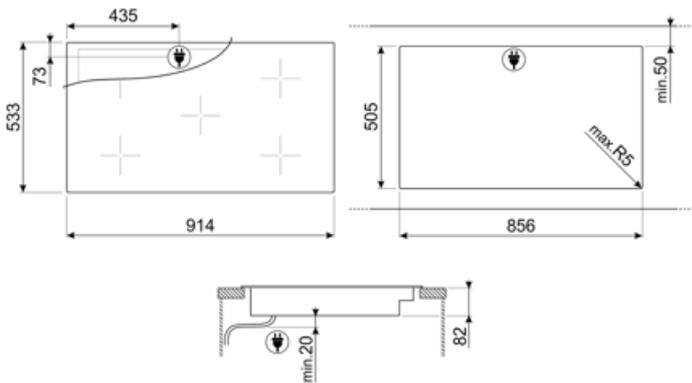

---

## Compatible Accessories

---



### SCRP

Induction and ceramic hobs and teppanyaki scraper

## Symbols glossary

	Power booster: option allows the zone to work at full power when very intense cooking is necessary.		Ultra-low profile: Installation of product with flat edge - height of 1 mm.
	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.		Touch control
	ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.		Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.
	Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.		Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.
	Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.		Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.
	Time elapsed: shows how long the cooking zone has been in use.		Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.