

SEU365ETB

**Product family**

Cooktop

Installation

Ultra-low profile

Dimensions

36"

Power supply

Electric

Type

Ceramic

EAN code

8017709241001



Aesthetic

**Color**

Black

Finishing

Glass

Material

Glass

Glass

Ceramic

Glass edge

Beveled

Control setting type

Touch controls

Controls position

Front

Logo

Silkscreened

Silkscreen color

Gray

Program / Functions

**No. of ceramic cook zones**

5

Cooking zones with Booster

5

Power levels

9

Cooking zones

5

Options

**End cooking timer**

1

Limited Power

4000 W

Consumption Mode in W**Showroom mode**

Yes

| | | | |
|---|-----|--------------------------|-----|
| Residual time indicator | Yes | Child safety lock | Yes |
| Limited power consumption option | Yes | Quick start | Yes |

Technical Features



Front-left - Ceramic - single - 1.20 kW - Ø 14.8 cm

Rear-left - Ceramic - double - 0.75 - 1.80 kW - Ø 12.4 - Ø 18.4 cm

Center - Ceramic - Triple - 1.05 - 1.95 - 2.70 kW - Ø 15.0 - Ø 21.6 - Ø 28.8 cm

Rear-right - Ceramic - single - 1.80 kW - Ø 18.4 cm

Front-right - Ceramic - single - 1.20 kW - Ø 14.8 cm


Automatic switch-off in case of over-heating

Residual heat indicator Yes

Automatic switch-off in case of overflow

Electrical Connection

| | | | |
|----------------------------|--------------|--------------------------|----------|
| Nominal power | 8700 W | Frequency | 60 Hz |
| Current | 25 A | Power cord length | 47 1/4 " |
| Voltage | 240 V | Terminal box | 6 poles |
| Voltage 2 (V) | 208 V | Plug | No |
| Electric cable type | Single phase | | |

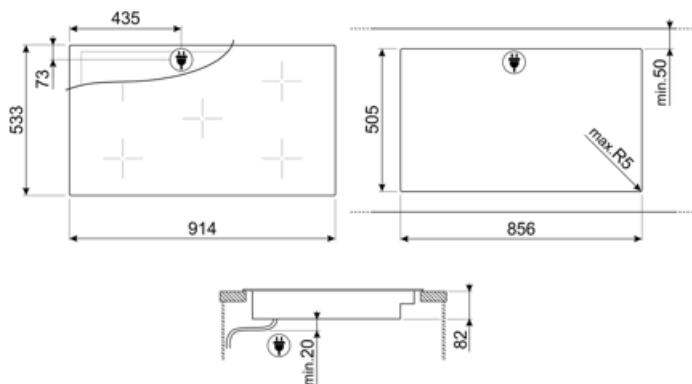

Compatible Accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper

Symbols glossary

| | | | |
|--|---|---|--|
|  | Power booster: option allows the zone to work at full power when very intense cooking is necessary. |  | Ultra-low profile: Installation of product with flat edge - height of 1 mm. |
|  | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed. |  | ECO-logic: option allows you to restrict the power limit of the appliance real energy saving. |
|  | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit. |  | Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light. |
|  | Overflow protection: The special overflow protection shuts down the stove in the presence of overflow of liquids. |  | Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached. |
|  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |  | Time elapsed: shows how long the cooking zone has been in use. |
|  | Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time. |  | Touch control |